ORDER NO. BSD0012M910

# Service Manual

Sec. 1 Operating Instructions

Sec. 2 Disassembly Procedure and Service Information


Sec. 3 Electrical Adjustment

Sec. 4 Block Diagrams and Schematic Diagrams

Sec. 5 Exploded Views & Replacement Parts List

**Convertible Camera** 

AW-E800AP AW-E800AE

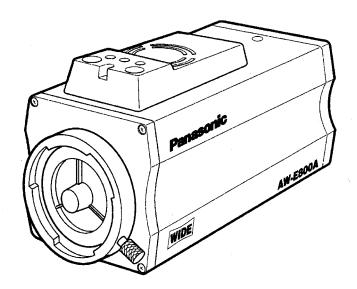

Circuit Board Diagrams and Electrical Parts List of AW-E800AP/AE are described in CD-ROM Service Manual



© 2000 Matsushita Electric Industrial Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

### 

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

### FOR AW-E800AP

# **SPECIFICATIONS**

Source Voltage: DC 12 V

Power consumption: 16.8 W (Power OFF 0 W)

Optical system:

Dychroic prism optical system, F1.4

Pick up element: Valid pixels:

2/3" interline wide CCD

General pixels: Scanning frequency: 980 (H) x 494 (V) (About 48.000 pixels) 1038 (H) x 504 (V) (About 52.000 pixels)

525 lines 60 field 30 flame

Synchronizing:

Internal synchronizing input: ELA standard

Video output:

External synchronizing input: BBS or VBS (BNC x 1, Dsub 50 P x 1) 1.0 Vp-p Composite/75Ω (BNC x 1, Dsub 50 P x 1, Y/C Dsub 50 P x 1)

Sensitivity:

2.000 lx (F9.5, 3.200K)

Minimum illumination:

3 lx (F1.7, +30 dB) Output 70% and above 1.5 lx (F1.7, Night eye mode) Output 70% and above (Only when black stretch ON)

63 dB (Y signal, DTL, chroma, gamma OFF) S/N ratio:

Horizontal resolution:

850 TV lines (high band DTL)

Contour correction: White balance:

Horizontal, vertical (2H) AWCA, AWCB (R/B gain, painting), ATW 3.200K, 5.600K preset

Black balance:

Auto (R/B pedestal, painting function) 7 levels

Adjustable chroma level:

High light chroma: **Encoding:** 

OFF, LOW, HIGH Y, R-Y, B-Y

Gain switch:

0 to 30 dB step, AGC L/H, Nighteye

Shutter speed:

1/100, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000 ELC

Syncro scan (60.34 Hz to 15.75 KHz)

CCD reading switch:

Field, Flame1, Flame2

Color bar:

**SMPTE** 

Lens mount:

2/3" bayonet mount

Lens focus:

Auto, Manual (only with remote control), Adjust ON/OFF MENU (†)

Switches:

ITEM/AWC (1) (AWC: when menu monitor is not shown) YES/ABC (+) (ABC: when menu monitor is not shown) NO/BAR (-) (BAR: when menu monitor is not shown)

Input/Output connector:

VIDEO OUT: BNC connector

G/L IN: IRIS:

**BNC** connector 12 P round connector

DC 12 V IN: DC connector I/F REMOTE: 50 P Dsub connector

Indication:

Red LED lits: POWER ON Storing -20°C to +60°C

Tolerance temperature:

Performance guaranteed +5°C to +35°C

Operating guaranteed -10°C to +45°C Storing 20 % to 90 %, Operating 20 % to 90 %

Tolerance humidity: Dimensions (W  $\times$  H  $\times$  D):

3-5/16" x 3-3/4" x 7-9/16" (83.5 x 94 x 192 mm)

Weight:

2.42 lbs (1.1 kg)

Weight and Dimensions indicated above are approximate. Specifications are subject to change without notice.

### FOR AW-E800AE

# **SPECIFICATIONS**

Source Voltage: DC 12 V

Power consumption: 16.8 W (Power OFF 0 W)

Optical system:

Pick up element: Valid pixels:

General pixels: Scanning frequency:

Synchronizing:

Dychroic prism optical system, F1.4 2/3" interline wide CCD

980 (H) x 582 (V) (About 570,000 pixels) 1038 (H) x 594 (V) (About 620,000 pixels) 625 lines 50 field 25 flame

Internal synchronizing input: PAL standard

External synchronizing input: BBS or VBS (BNC x 1, Dsub 50 P x 1) 1.0 Vp-p Composite/75 $\Omega$  (BNC x 1, Dsub 50 P x 1, Y/C Dsub 50 P x 1)

AWCA, AWCB (R/B gain, painting), ATW 3,200K, 5,600K preset

Video output:

Sensitivity: Minimum illumination:

2,000 lx (F9.5, 3,200K) 3 lx (F1.7, +30 dB) Output 70% and above

1.5 lx (F1.7, Night eye mode) Output 70% and above (Only when black stretch ON) 61 dB (Y signal, DTL, chroma, gamma OFF)

S/N ratio:

Horizontal resolution:

Registration: Geometric distortion: 0.05 % (General monitor excepted for the influence of lens) 0% (General monitor excepted for the influence of lens) 16:9,4:3 Horizontal, vertical (2H)

850 TV lines (high band DTL ON)

Aspect ratio conversion:

Contour correction:

White balance: Black balance:

Adjustable chroma level:

High light chroma:

Encoding:

Gain switch: Shutter speed:

Y, R-Y, B-Y 0 to 30 dB step, AGC L/H, Nighteye

Auto (R/B pedestal, painting function)

1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000, ELC Syncro scan (50.40 Hz to 15.63 KHz)

CCD reading switch:

Color bar: Lens mount: Lens focus:

**FULL** 2/3" bayonet mount Auto, Manual (only with remote control), Adjust ON/OFF

Field, Flame1, Flame2

OFF, LOW, HIGH

7 levels

MENU (†) Switches:

ITEM/AWC (1) (AWC: when menu monitor is not shown) YES/ABC (+) (ABC: when menu monitor is not shown) NO/BAR (-) (BAR: when menu monitor is not shown) VIDEO OUT: BNC connector

Input/Output connector:

**BNC** connector G/L IN: 12 P round connector IRIS: DC 12 V IN:

DC connector I/F REMOTE: 50 P Dsub connector Red LED lits: POWER ON

Indication: Tolerance temperature: Storing -20°C to +60°C

Performance guaranteed +5°C to +35°C Operating guaranteed -10°C to +45°C Storing 20 % to 90 %, Operating 20 % to 90 %

Tolerance humidity: Dimensions (W x H x D):

83.5 x 94 x 192 mm

Weight:

1.1 kg

Weight and Dimensions indicated above are approximate. Specifications are subject to change without notice.

### CONTENTS

SEFET	PRECATIONS	3
SEC 1.	OPERATINGINSTRUCTIONS	OPE-1
SEC 2.	DISASSEMBLY PROCEDURES AND SERVIE INFORMATION	INF-1
SEC 3.	ELECTRICAL ADJUSTMENT	DIS-1
SEC 4.	BLOCK DIAGRAMS	BLK-1
	SECSCHEMATIC DIAGRAMS	SCM-1
SEC5.	EXPLODED VIES & REPLACEMENT PARTS LIST	PRT-1

### FOR AW-E800AP



### CAUTION





### CAUTION:

TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER SERVICEABLE PARTS INSIDE. REFER TO SERVICING TO QUALIFIED SERVICE PERSONNEL.



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (service) instructions in the literature accompanying the appliance.

This Class A digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

### FCC Note:

This device complies with Part 15 of the FCC Rules. To assure continued compliance follow the attached installation instructions and do not make any unauthorized modifications.

This equipment has been tested and found to comply with the limits for a class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

### **WARNING:**

TO REDUCE THE RISK OF FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE.

### **CAUTION:**

TO REDUCE THE RISK OF FIRE OR SHOCK HAZARD AND ANNOYING INTERFERENCE, USE THE RECOMMENDED ACCESSORIES ONLY.

The serial number of this product may be found on the bottom of the unit.

indicates the safety information.

### FOR AW-E800AE

■ DO NOT REMOVE PANEL COVER BY UNSCREWING.

To reduce the risk of electric shock, do not remove cover. No user serviceable parts inside.

Refer servicing to qualified service personnel.

### **WARNING:**

TO REDUCE THE RISK OF FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE.

### CAUTION:

TO REDUCE THE RISK OF FIRE OR SHOCK HAZARD AND ANNOYING INTERFERENCE, USE THE RECOMMENDED ACCESSORIES ONLY.

indicates safety information.

### **SAFETY PRECAUTIONS**

### **GENERAL GUIDELINES**

- When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been over-heated or damaged by the short circuit.
- After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
- After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

### LEAKAGE CURRENT COLD CHECK

- Unplug the AC cord and connect a jumper between the two prongs on the plug.
- Measure the resistance value, with an ohm meter, between the jumpered AC plug and each exposed metallic cabinet part on the equipment such as screwheads, connectors, control shafts, etc. The resistance value must be more than 5MΩ.




Figure1

### **LEAKAGE CURRENT HOT CHECK (See Figure 1)**

- Plug the AC cord directly into the AC outlet.
   Do not use an isolation transformer for this check.
- Connect a 1.5ΚΩ, 10W resistor, in parallel with a 0.15μ F capacitor, between each exposed metallic part on the set an a good earth ground such as a water pipe, as shown in Figure 1.
- 3. Use an AC voltmeter, with 1000 ohms/volt or more sensitivity, to measure the potential across the resistor.
- Check each exposed metallic part, and measure the voltage at each point.
- Reverse the AC plug in the AC outlet repeat each of the above measurements.
- 6. The potential at any point should not exceed 0.15 volts RMS. A leakage current tester (Simpson Model 229 equivalent) may be used to make the hot checks, leakage current must not exceed 0.1 milliamp. In case a measurement is outside of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

### **ELECTROSTATICALLY SENSITIVE (ES) DEVICES**

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically sensitive (ED) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by static electricity.

- Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any electrostatic charge on your body by touching a known earth ground.
  - Alternatively, obtain and wear a commercially available discharging wrist trap device, which should be removed for potential shock reasons prior to applying power to the unit under test.
- After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as alminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
- Use only a grounded tip soldering iron to solder or unsolder ES devices.
- Use only an anti-static solder removal device classified as "anti-static" can generate electrical charges sufficient to damage ES devices.
- 5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
- Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (most replacement ES devices are package with leads electrically shorted together by conductive foam, alminum foil or comparable conductive material).
- Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.
  - CAUTION: Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.
- Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise hamless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity sufficient to damage an ES device).

# SECTION 1


# **OPERATING INSTRUCTIONS**


# **CONTENTS**

MAJOR OPERATING CONTROLS AND THEIR FUNCTIONS	
MOUNTING	OPE-3
Lens Mounting	
Camera Mounting	OPE-3
FLANGE BACK ADJUSTMENT (FOR ZOOM LENS)	OPE-4
IRIS GAIN CONTROL IN LENS	OPE-4
CONNECTIONS	OPE-5
CONNECTION OF DEVICE WITH A COMPOSITE INPUT CONNECTOR	OPE-5
CONNECTION OF A REMOTE CONTROL UNIT (RCU)	OPE-5
CONNECTION OF A REMOTE CONTROL BOX (RCB)	OPE-6
CONNECTION OF DEVICES WITH CAMERA PAN/TILT CONTROL SYSTEM	OPE-6
CONNECTION WITH MULTILE CAMERA (COLOR LOCK MODE)	OPE-7
CONNECTION OF COMPUTER	OPE-7
ADJUSTMENT	OPE-8
AUTOMATIC WHITE BALANCE CONTROL (AWC)	OPE-8
AUTOMATIC TRACKING WHITE BALANCE SETTING (ATW)	
RESET TO 3200K OR 5600K WHITE BALANCE	
BLACK BALANCE ADJUSTMENT	OPE-9
MANUAL WHITE BALANCE SETTING	OPE-9
RESET TO 3200K OR 5600K WHITE BALANCE	
BLACK BALANCE ADJUSYMENT	OPE-9
TOTAL PEDESTAL LEVEL ADJUSTMENT	
GEN-LOCK ADJUSTMENT	
HORIZONTAL PHASE CONTROL	
COLOR PHASE ADJUSTMENT	
USE MODE SETTING	OPE-1
Use Mode Setting	
SETTING BY CAMERA	OPE-11
SETTING BY RCU (RCB) OR HYBRID CONTROL PANEL	
MENU ITEM SETTING	
MENU ITEM SETTING	
SETTING	
SUB MENU (Halogen Mode, Fluorescent Mode, Outdoor Mode)	OPE-13
Setting and Changing of the Setting (Halogen Mode, Fluorescent Mode, Outdoor Mode)	OPE-14
Sub Menu (User Mode)	OPE-17
Setting and Changing of the Setting Items (User Mode)	OPE-17
SETTING TO INITIAL SET	OPE-21
Setting to initial set	OPE-21
INITIAL SETTINGS OF THE SETTING ITEMS (Factory preset values)	OPE-21
APPEARANCE	OPE-22


# MAJOR OPERATING CONTROLS AND THEIR FUNCTIONS

### <Front View>






### <Side View>



### <Bottom View>



-8-

# 

### 3. Lens fixing ring knob

Rotate the lens fixing ring knob counterclockwise and remove the lens mount cap. Mount the lens on the camera and rotate the lens fixing ring knob clockwise in order to fix the lens securely.

### 4. Cooling Fan

- Do not cover the port or otherwise block ventilation during operation. Internal heat buildup can cause a fire.
- The cooling fan has a service life of about 30 000 hours. (at a room temperature of 25°C) Replace the fan that has come to the end of its service life. (If the fan is used at a room temperature of 35°C and above, replace it about 30% sooner.)
   Whenever fan replacement is necessary, be sure to

Whenever fan replacement is necessary, be sure to ask the store where you purchased the set.

# 5. MENU Switch (MENU/1)

A menu will appear on the monitor screen when this switch is pressed for about 5 seconds. This item can be selected by pressing the switch while the menu is on the screen.

### 6. ITEM/AWC Switch (ITEM/AWC/1)

The item just below can be selected by pressing this switch while the menu is on the screen. When the menu is not displayed or the camera is in shooting mode, the automatic white balance control can be set with this switch.

### 1. Lens Mount

2/3" Standard bayonet type (B4 mount) lens or a microscope adaptor can be mounted.

### 2. Mounting hole

A screw hole (1/4" - 20 UNC) for mounting the camera on a wall, ceiling with a mounting bracket or tripod.

### 7. YES/ABC Switch (YES/ABC/+)

The Sub Menu for each item of the Main Menu is displayed when this switch is pressed while the Main Menu is on the screen.

While the Sub Menu is displayed, any setting can be brought up to a higher value with this switch. When the menu is not displayed or the camera is in shooting mode, the automatic black balance control can be set with this switch.

### 8. NO/BAR Switch (NO/BAR/-)

The item just below can be selected by pressing this switch while the Sub Menu is on the screen. While the Sub Menu is displayed any setting can be brought down to a lower value with this switch. When the menu is not displayed or the camera is in shooting mode, the color bar and the shooting conditions are alternately indicated by pressing the switch.

### 9. Video Output Connector (VIDEO OUT)

A composite video signal is provided at this connector.

### 10. Iris Connector (IRIS)

Input terminal for lens with an iris control function.

Pin No.	Signal	Pin No.	Signal
1	Return Control	7	Iris Follow
2	Not Used	8	Auto/Remote Control
3	GND	9	Not Used
4	Auto/Manual Control	10	Not Used
5	Iris Control	11	Not Used
6	Lens Power	12	Not Used

Iris Connector (IRIS)



<Front View>

-10-

### 11. VF Remote Connector (VF REMOTE)

Input terminal dedicated to control signals from the optional Remote Control Box (RCB) (WV-CB700A) and the RCU (WV-RC700A, WV-RC550) and the camera pan/tilt unit (AW-PH300A).

- WV-CB700A is connected through the optional RCB cable (AW-CA50T10/AW-CA50B10).
- WV-RC700A/WV-RC550 is connected through the optional RCU cable (AW-CA50A26).
- \* AW-PH300A is connected through the optional pan/ tilt unit cable (AW-CA50T15/AW-CA50A15).

### 12. Power Indicator

Red LED lamp lights to indicate that the specified DC power is supplied to the camera.

### 13. DC 12 V Input Connector (DC 12V IN)

12 V DC is supplied through the optional DC power supply cable (AW-CA4T1).



### \_ Cautions \_

- 1. Connect this to a DC 12 V class 2 power supply only.
- To prevent fire or shock, the UL listed wire VW-1, style 1007 should be used as for the cable for DC 12 V Input Connector.

### 14. Cable Clamp

Clamp the DC Power Supply Cable (AW-CA4T1) connected to the DC 12 V Input Connector to prevent it from slipping out.

### 15. G/L Input Connector (G/L IN)

Signals synchronized with the reference signal are to be supplied to this connector when the camera is to be synchronized with the reference signal BB.

### 16. Optional Card Slot


Slot for inserting an optional card. For details, refer to the manual for optional cards.

# **MOUNTING**

- Lenses of any make can be mounted on the camera as long as they are equipped with a 2/3" standard bayonet.
- Use the lens extension cable AW-CA12T12A (6"/ 15 cm) if your lens cable is too short.

### 1. Lens Mounting


Rotate the lens fixing ring knob counterclockwise and remove the lens mount cap. Mount the lens on the camera and rotate the lens fixing ring knob clockwise in order to fix the lens securely. Connect the camera cable to the IRIS connector on the back panel of the camera.




-12-

### 2. Camera Mounting

 To mount a camera on a pan/tilt head or a mounting bracket or the like, attach the mounting adaptor (supplied) to the bottom of the camera in case of bottom mounting.




- Fix the camera mounting base, pan/tilt unit, and tripod securely in the screw hole (1/4-20UNC) of the camera or the mounting adaptor.
- If the camera cannot be securely fixed, mount the camera on a mounting bracket or the like with the supplied rubber sheet between the camera and it.
- 4. To mount the camera on the pan/tilt head, use tools in order to fix it securely.




# FLANGE BACK ADJUSTMENT (FOR ZOOM LENS)

- 1. Fully open the iris by shooting a dark object. (Iris selection switch should be set to M.)
- 2. Loosen the flange back lock knob.
- Aim the camera at any object over 2 meters away from the camera.
- 4. Set the lens to its TELE end first and adjust its focus with the focus ring.
- 5. Set the lens to its widest angle next and adjust its focus with the flange back adjust ring.
- 6. Adjust the focus ring and the flange back adjust ring alternately for the best focus within the zooming range.

Tighten the flange back lock knob upon completion of focusing.






-14-

# IRIS GAIN CONTROL IN A LENS

An iris gain control hole is usually provided in the front of the lens. Adjustment of the iris gain, with a screwdriver through the hole may be done as follows. (Shape and location of the hole may vary depending on the type of lens.)

- 1. Turn the iris selection switch to Position A (AUTO).
- 2. Rotate the iris gain control to the maximum gain, but in a range where no hunting or oscillating of the iris ring develops.



Automatic iris power zoom lens


# CONNECTIONS

### Caution:

The connection and installation should be done by qualified service personnel or system installers. Refer any servicing to qualified service personnel.

### ■ CONNECTION OF DEVICE WITH A COMPOSITE INPUT CONNECTOR

- Connection to any device which has a composite input connector, such as a video monitor or a VTR, must be made through the VIDEO OUT Connector.
- Power supply to the camera must be through the optional DC power supply Cable AW-CA4T1.
- For DC power supply, use the optional AC adaptor AW-PS505.

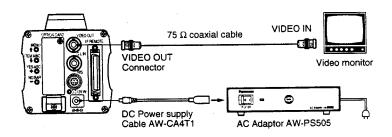

-16-

### ■ CONNECTION OF A REMOTE CONTROL UNIT (RCU)

Connection to the RCU (WV-RC700A, WV-RC550) is made through the optional RCU cable AW-CA50A26.

- 1. Turn RCU power off before connecting cables.
- 2. Set the cable selection switch of the RCU to MULTI (in case of using the WV-RC700A)
- 3. Connect the 50-pin connector of the RCU cable to the I/F REMOTE Connector of the camera.
- Turn RCU power on and the power indicator lamp will light. The camera can now be remote controlled by the RCU.


### Notes

- The maximum extension distance between the camera and WV-RC700A is 300 m. The maximum extension distance between the camera and WV-RC550 is 300 m.
- Use the following options for cable extension.
   Studio Cable WV-CA26U15 (15 m/50 ft)

WV-CA26U30 (30 m/100 ft) WV-CA26U100 (100 m/330 ft)

Cable Joint Adaptor

WV-CA26T26




### ■ CONNECTION OF A REMOTE CONTROL BOX (RCB)

The RCB (WV-CB700A) and the camera must be connected with the optional RCB cable AW-CA50T10.

- 1. Turn RCB power off before connecting cables.
- Connect the 50-pin connector of the RCB cable to I/F REMOTE connector of the camera. The 10-pin connector must be connected to the RCB.
- Turn RCB power on and the camera can be controlled remotely by the RCB.

### Notes

- The monitor output signals of the RCB attenuate and deteriorate with cable length. It is recommended that the signals from the monitor output be used for monitoring purposes only.
- · No gen-lock signal is available from the RCB.
- If a longer distance (more than 3 m) is desired between the camera and the RCB, use the following optional cable.

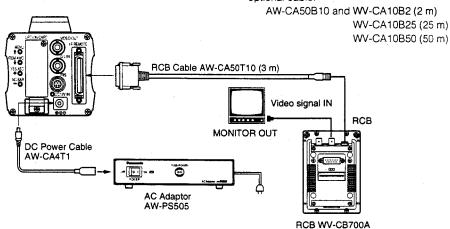


-18-

### ■ CONNECTION OF DEVICES WITH CAMERA PAN/TILT CONTROL SYSTEM


- To connect the pan/tilt unit (AW-PH300A) to the camera, use the pan/tilt unit cable AW-CA50T15.
- Power is supplied from the pan/tilt unit.
  - Before connecting them, press the power switch on the pan/tilt unit AC adaptor and the ON/OFF switch on the hybrid control panel in the OFF position, respectively.
  - 2. Fix the camera securely to the pan/tilt unit using the mounting adaptor.
  - Connect the 50-pin end of the pan/tilt unit cable to the I/F Remote connector on the camera.
     Connect the 15-pin end of the cable to the pan/tilt unit.
  - Connect the pan/tilt unit to the hybrid control panel with the 10BASE-T cable and coaxial cable. For details, refer to the manual for the hybrid control panel.
  - 5. First switch on the pan/tilt unit AC adaptor, then press the ON/OFF switch on the hybrid control panel in the ON position. The camera and pan/ tilt unit can now be controlled from the hybrid control panel.

**Caution:** When mounting the camera on the pan/tilt head, use tools in order to fix it securely.

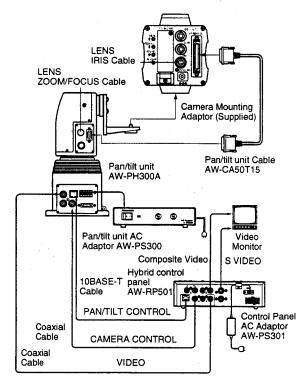

# ■ CONNECTION WITH MULTIPLE CAMERAS (COLOR LOCK MODE)


- An example of connection for VBS/BB input (Color lock mode).
- One of the multiple cameras is used as the source of reference signals.
- Supply a synchronizing signal (BB) to the G/L Input Connectors of each cameras.
- Do not switch off the camera used for supplying the reference signals.
- Adjust the SC-phase and H-phase at the Video Output Connector.

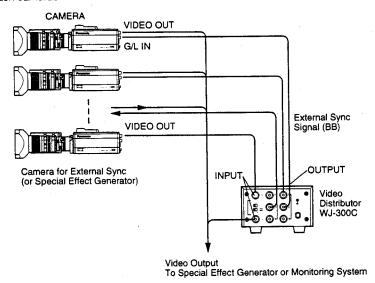

-20-

### **■ CONNECTION OF COMPUTER**

The system shown here can remotely control this camera by using a computer. The software and the cable for RS-232C required for this operation should be obtained locally. Please contact qualified service personnel for this software.

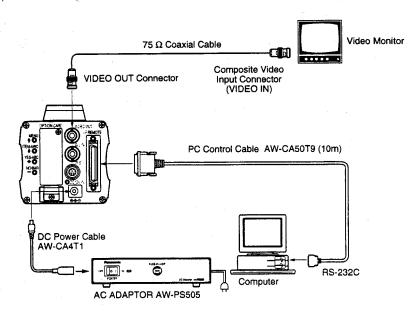

### **ADJUSTMENT**


# Color temperature and adjustment of white balance

When carbon is burnt, it develops various colors of light depending on the temperature. Natural light can be specified by color temperature referring to the color developed when carbon is burnt.

The light of 3 200K (K=Kelvin, -273C equals to absolute zero temperature OK) represents the same value (color) as what develops when carbon is burnt at 3 200K (2 927C). The relationship between the color temperature of the light source and weather condition is indicated in the right figure. Let's study the difference of shooting an indoor object from shooting one outdoors. Studios are usually lighted with incandescent lamps and the color temperature of a white object in a studio is around 3 200K. The color temperature of a white object outdoors is around 6 500K. The former may look a little yellowish while the latter appears somewhat bluish when they are shot by a camera. However, the human eye does not recognize color differences among these objects even under different ambient lighting conditions, because of their adaptability to light. The video camera reproduces color differences with high fidelity and the color of an object somewhat different from what appears to the human eye.

Therefore, there is a need to adjust the white balance in order to correct differences between color temperatures.

**NOTE:** Color temperature outdoors may vary depending on weather conditions.




### AUTOMATIC WHITE BALANCE CONTROL (AWC)

There are two white balance memories. "AWC A" or "AWC B" for two different light sources color temperatures, with the automatic white balance setting. Then, when the two different light sources are encountered, you may operate the camera properly by simply change the white balance mode to either AWC A or AWC B. There is no need to readjust the camera to the ambient conditions.

- The preset conditions will be renewed whenever you input new conditions.
- Turn the white balance selection switch to either "AWC A" or "AWC B" of RCU or select the white balance mode either AWC A or AWC B by menu.
- Aim the camera at a white object (a white wall or a white handkerchief) and zoom in to enlarge the image as much as possible.


### [ADJUSTMENT by CAMERA]

In normal shooting mode:
 Press the ITEM/AWC switch for over 2 second.



[ADJUSTMENT with the RCU (RCB, Hybrid control panel)]

4. When the AUTO set switch is turned to AWC, the white balance will be automatically set. While the system is being set, auto warning indicator (LED) blinks and it goes out when the white balance setting is completed. If the lamp remains lit, the setting must be tried again.




-23-

-22-

### Notes:

- For white balance setting aim the camera at a
  white object and try to position it in the center of
  the monitor screen. The object must appear in
  over 10 % of the total monitor screen area. Try
  to avoid overly bright objects in the scene.
- White balance may not be correctly set if the lighting of the object is too weak.

The white object must occupy over 10 % of the monitor screen area.



- Since the camera has a built-in memory, the set white balance will remain in the memory even if power is turned off. Therefore, it is not necessary to reset the white balance if the color temperature of those objects remains unchanged. However, it must be reset if the color temperature changes, such as when you move from indoors to outside, or vice versa.
- When the camera is used without a RCU or RCB red/blue gain adjustment of painting setting will be automatically reset to ±0 after setting the white balance. (painting setting in only USER MODE.)

# ■ AUTOMATIC TRACKING WHITE BALANCE SETTING (ATW)

White balance will be automatically set to continuously match changes of light source and color temperature while the white balance setting is set to ATW.

Notes: • ATW might not function properly when high brightness light (ex. fluorescent lamp) beams into a screen.

• White balance may not be accurately set if there is no white object in the scene being shot.

### **■ MANUAL WHITE BALANCE SETTING**

[ADJUSTMENT by CAMERA]

Manual setting is possible in USER MODE only.

- Select the white balance mode either AWC A or AWC B by menu.
- Aim the camera at a large white object. Press the ITEM/AWC switch for over 2 second.
- Adjust the red gain/blue gain control in the PAINT-ING item of Color Set sub menu of USER MODE until the carrier wave of the white portion of the video signal is at the minimum width or the white object in the monitor screen appears pure white. (Use an oscilloscope or a waveform monitor for precise adjustment.)

[ADJUSTMENT with the RCU (RCB)]

After AWC setting, adjust the R/B GAIN controller in the same way as described in Step 3 above.

-24-

Minimize the carrier wave using the red & blue gain controls

Waveform for white balance set chart

# ■ RESET TO 3 200K OR 5 600K WHITE BALANCE

When the white balance setting is set to either "P SET 3 200K" or "P SET 5 600K" the white balance will be automatically set to the color temperature 3 200K or 5 600K, respectively.

### ■ BLACK BALANCE ADJUSTMENT

· Close the lens.

If the motor drive lens is controlled from the camera, the lens is automatically closed when the black balance is adjusted.

 When the camera is used without a RCU or RCB, R/B pedestal adjustment of painting setting will be automatically reset to ±0 after setting the black balance. (painting setting in only USER MODE.)


### [ADJUSTMENT by CAMERA]

Press the YES/ABC Switch for over 2 seconds and the black balance will be set automatically in 10 seconds.

In user mode, black balance fine adjustment can be performed with the red pedestal/blue pedestal setting after setting the black balance.

[ADJUSTMENT with the RCU (RCB, Hybrid control panel)]

Set the AUTO set switch to ABC and the black balance will be automatically set. While the system is being set, the auto warning indicator (LED) blinks and it goes out when the black balance setting is completed. If the lamp remains lit, ABC should be tried again.




### ■ TOTAL PEDESTAL LEVEL ADJUST-MENT

(Use an oscilloscope or a waveform monitor for this adjustment.)


This step is to adjust the black levels (pedestal levels) of two or more cameras to be the same.

### [ADJUSTMENT by CAMERA]

- 1. Close the lens.
- Select Pedestal item in the brightness setting Sub Menu (Select [Pedestal] in the [Iris, Shutter, Gain Set] sub menu in USER MODE.)
- Set the pedestal level to 5IRE (0.035 V) 0.025 V (PAL) with the YES/ABC switch or the NO/BAR switch.



[ADJUSTMENT with RCU (RCB, Hybrid control panel)] Adjustment the pedestal level to 5 IRE, 0.025 V (PAL) with the total pedestal adjustment.




-26-

### **■ GEN-LOCK ADJUSTMENT**

Phase adjustments must be performed with the camera or the RCU (RCB) when external synchronizing signals are supplied to the system in cases where multiple cameras are used or peripheral devices are connected.


### HORIZONTAL PHASE CONTROL

Observe the waveform of the external synchronizing input signal (black burst signal) and video output signal on a two-channel oscilloscope. Then match the horizontal phase of both signals by adjusting them with the cameras or RCU's horizontal phase control.




### [ADJUSTMENT by CAMERA]

- Press the NO/BAR switch for over 5 seconds to display the color bar.
- 2. Select [G/L Adjustment] on the main menu, then select [H PHASE] on the submenu.
- Adjust the horizontal phase with the YES/ABC and NO/BAR switch.



[ADJUSTMENT with RCU (RCB, Hybrid control panel)] Use the horizontal phase control.




-27-

### CAUTION:

When horizontal phase adjustment is required using RCU (RCB) or Hybrid Control Panel, BAR/CAM switch should be set to BAR. Horizontal phase cannot be adjusted if the switch is in the CAM position. After adjustment set BAR/CAM switch back to CAM.

### **OCCUPHASE ADJUSTMENT**

Supply the output signal (split color bar) from the color special effect generator to a color monitor or vectorscope. Adjust the color phase of the camera.



### [ADJUSTMENT by CAMERA]

- Press the NO/BAR switch for over 5 seconds for the color bar mode.
- 2. Select [G/L Adjustment] on the main menu, then select [SC Coarse] on the sub menu.

- Make coarse adjustment with the YES/ABC switch and the NO/BAR switch.
- Select [SC Fine] on the sub menu. Perform fine adjustment with the YES/ABC switch and the NO/BAR switch.



[ADJUSTMENT with RCU (RCB, Hybrid control panel)] Use the subcarrier phase coarse adjustment control and subcarrier phase fine control.

\* It is recommended that a vectorscope be used for maximum accuracy in color phase adjustment.

### CAUTION:

When color phase adjustment is required using RCU (RCB) or Hybrid Control Panel, BAR/CAM switch should be set to BAR. Color phase cannot be adjusted if the switch is in the CAM position. After adjustment set BAR/CAM switch back to CAM.

-28-

# **USE MODE SETTING**

### **■** Use Mode Setting

The camera has four use modes, and various functions for four use modes have been preset.

Functions can be set as best suited to each use mode.

- Halogen mode
  - Suited to indoor shooting, such as at weddings, parties, lecture meetings, events, etc.
- Settings can be changed using a simple menu.
- Fluorescent mode
   Suited to indoor shooting under fluorescent lighting.
- Settings can be changed using a simple menu.
  Outdoor mode
  Suited to outdoor shooting.

Settings can be changed using a simple menu.


User mode
 Settings can be changed using a detail menu.

### **■ SETTING BY CAMERA**

 Turn the camera on while keeping the MENU switch depressed.

The use mode setting menu shown at right appears on the monitor screen and one of the use mode blinks.

- Press the MENU switch, ITEM/AWC switch, or NO/BAR switch to let the desired use mode blink.
   MENU switch (†): The blinking item moves up by one.
  - ITEM/AWC switch (1), NO/BAR switch (-): The blinking item moves down by one.



3. Press the YES/ABC switch.

The blinking use mode comes into effect. After the use mode setting menu is shown for about 5 seconds, the camera returns to be ready for operation. Then, the camera operates in the selected use mode.

# ■ SETTING BY RCU (RCB) OR HYBRID CONTROL PANEL

An operation mode is selected depending on the position of the scene file switch.

Operation mode	Scene File Switch Position of RCU (RCB)	Scene File Switch Position of Hybrid control panel
Halogen Mode	1	1
Fluorescent Mode	2	2
Outdoor Mode	3	3
User's Mode	USER SET	4




MENU -

ITEM/AWC


YES/ABC

NO/BAR





Hybrid Control Panel



-30-

### MENU ITEM SETTING

### **■ MENU ITEM SETTING**


- Each of the four use modes of the camera has a main menu. (Shown at right)
- Each item of the main menu has a submenu, which consists of several settings.
- These settings have been preset to the optimum values to suit each use mode, and can be changed to suit actual shooting conditions.
- They can be set from the camera and RCU (RCB).
   They can also be set from the hybrid control panel using the switches, but the setting items are limited because the menu is not shown.

### Notes:

- Composite signals are output from the video output regardless of the position ENC/VF of the RCU (RCB) user set switch.
- [End] is displayed only in setting from the camera alone.
- [Option Card Set] is shown only when an optional card is inserted.

### MAIN MENU SCREEN

Main Menu of Halogen, Fluorescent, Outdoor Mode



Main Menu of User Mode

\*\*User Mode Set\*\*
Iris, Shutter, Gain Set
Color Set
G/L, Color Bar Set
Detail Set1 Detail Set2
Color Matrix Set
Other Set
Option Card Set
Initialize Data

-31-

### **■ SETTING**

### 1. From the camera alone:

Keep the MENU switch depressed for 5 seconds or more.

### From RCU (RCB):

Set the user set switch in the pocket to the ON position.


The main menu appears on the monitor screen.


- Each time the MENU switch (1), ITEM/AWC switch (1), or NO/BAR switch (-) is pressed, the blinking item moves up or down.
- When the YES/ABC switch is pressed after selecting the desired item to blink, the submenu for the selected item appears on the screen.
- Select the desired item to be changed in its settings using the the MENU switch (†) and ITEM/AWC switch (1).
- 5. Press the YES/ABC switch (+) or NO/BAR switch (-) to change the settings.
- Select [Return] using the MENU switch and ITEM/ AWC switch, then press the YES/ABC switch to return to the main menu.
- After changing the settings, take the following steps

Camera alone: Select [End] using the MENU switch and ITEM/AWC switch and press the YES/ABC switch.

**RCU (RCB):** Set the user set switch in the pocket to the OFF position.


The camera will now operate according to the new settings.





-32-

### ■ SUB MENU (Halogen Mode, Fluorescent Mode, Outdoor Mode)

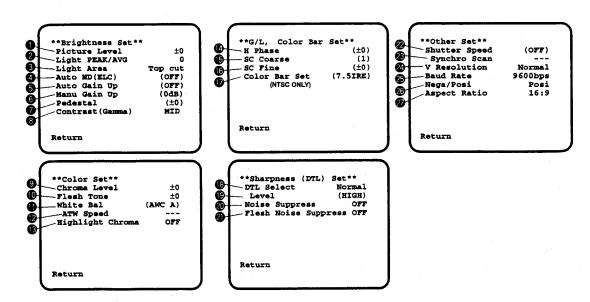

- Settings enclosed in parentheses can be set with the RCU (RCB) switch or VR in RCU (RCB) mode.
- To return to the initial settings, refer to page 48.

### Setting and Changing of the Setting (Halogen Mode, Fluorescent Mode, Outdoor Mode)

Video Level Adjustment [Picture Level: -50 - +50]

> Convergence level of AUTO IRIS/AUTO GAIN UP/ AUTO ND (ELC) can be adjusted.

### Detecting Ratio Adjustment [Light PEAK/AVG: P50 - A501

The ratio of AUTO IRIS/AUTO GAIN UP/AUTO ND (ELC) detected peak to average can be adjusted within a predetermined range.

### Photometric Measurement Method Setting [Light] Area: All, Center, Top cut, BTM cut, R/L cut

A photometric measurement method can be selected for AUTO IRIS/AUTO GAIN UP/AUTO ND (ELC). All: All the screen area is measured.

Center: The screen is measured mainly in the center area, about one-third of both the top and bottom and one-third of both the right and left portions of the screen are excluded from measure-

Top cut: About one-third of the top part of the screen is excluded from measurement.

BTM cut: About one-third of the bottom portion of the screen is excluded from measurement.

R/L cut: About one-third of both the right and left portions of the screen are excluded from measurement




### Auto ND (ELC) Setting [Auto ND (ELC): ON/OFF]

ON: The electronic shutter is controlled to automatically adjust the luminance.

OFF: Luminance is not automatically adjusted by the electronic shutter.

### Notes

- ON is automatically selected when the electronic shutter on the submenu [Other Set] is set to [Auto ND]. OFF is selected when other than [Auto ND] is selected.
- ON is selected when the SHUTTER switch is set to [ELC] in RCU (RCB) mode, and OFF is selected when it is set to other than [ELC].



-34-

### Auto Gain Up Control Setting [Auto Gain Up: OFF/LOW/HIGH]


LOW: The Auto Gain Up control with a maximum gain increase of about 18 dB adjust the luminance automatically.

HIGH: The Auto Gain Up control with a maximum gain increase of about 30 dB operates.

OFF: No auto gain up takes place. (Gain can be increased manually.)

### Notes

- In case of settings on the camera alone or when the iris switch on the RCU (RCB) is at [AUTO], the Auto Gain Up control may not operate if the lens iris switch is in the manual position.
- When the AGC switch on the hybrid control panel is set to AGC, the Auto Gain Up control operates in the HIGH position.




### 6 Manual Gain Up Control Setting [Manu Gain Up: 0 dB - 30 dB / N/Eye]

Manual setting is possible only when the Auto Gain Up control is in the OFF position.

0 dB: 0 dB should be selected in normal cases.

1 dB - 30 dB: Use this range if sufficient video output cannot be obtained even when the lens iris is opened in shooting dark scenes.

N/Eye (Night Eye): Use this mode if sufficient video output cannot be obtained even if 30 dB gain up should be selected.



Black Level Setting [Pedestal: -30 - +30]

The black level (pedestal) of the luminance (Y) signal can be set. Used in adjusting the black levels of two or more cameras.

Contrast Adjustment [Contrast (Gamma): LOW/MID/HIGH]

Contrast can be adjusted to any of three levels.

② Chroma Level Adjustment [Chroma Level: -3 - +3]

Chroma Level can be decreased or increased to any of three levels each.

Skin Color Adjustment [Flesh Tone: -3 - +3] Skin color can be decreased or increased to any of three levels each.

### White Balance Setting [White Bal: ATW/AWC A/ AWC B/P SET 3 200K/P SET 5 600K]

**ATW:** The white balance is automatically adjusted to be always right.

**AWC A, AWC B:** Once the white balance is adjusted with the ITEM/AWC switch on the back of the camera, it is no longer necessary to set the white balance again if you simply select AWC A or AWC B, provided that the camera is used under the same conditions.

Fine color adjustment can be made after setting AWC by red/blue gain adjustment in user mode or from the RCU (RCB).

- P SET 3 200K: The white balance is adjusted to 3 200K illumination.
- P SET 5 600K: The white balance is adjusted to 5 600K illumination.

Note

Neither P SET 3 200K nor P SET 5 600K can be set from the RCU (RCB) or the hybrid control panel

♠ ATW Speed Setting [ATW Speed: SLOW 2/ SLOW 1/MIDDLE/FAST 1/ FAST 2]

ATW Speed can be set.

Highlight Chroma Setting [Highlight Chroma: OFF/LOW/HIGH]

At LOW or HIGH, the color dynamic range widens to prevent highlighted white portions from suppression

Horizontal Phase Adjustment [H Phase: -206 - +49]

Horizontal phase can be adjusted when a genlock signal is supplied.

-36-

# Sub Carrier Phase Coarse Adjustment [SC Coarse: 1/2/3/4]

Coarse adjustment of subcarrier phase can be made when a genlock signal is supplied.

Subcarrier Phase Fine Adjustment [SC Fine: -511 - +511]

Fine adjustment of subcarrier phase can be made when a genlock signal is supplied.

Color Bar Setup Setting [Color Bar Set: 0.0 IRE/7.5 IRE] (NTSC ONLY)

The setup level of color bar can be adjusted.

Detail Select Setting [DTL Select: Normal/Super DTL]

If contour correction is not sufficient at the Normal position when Detail Level setting (a) is set to LOW or HIGH, select the Super DTL position.


Note

Neither Normal nor Super DTL is valid for contour correction if Detail Level setting (9) is in the OFF position.

Detail Level Setting [Level: OFF/LOW/HIGH]

Detail level can be adjusted when Detail Select setting (1) is at Normal. Super DTL level can be adjusted when it is at Super DTL.

In case of using the RCU (RCB), the above can be adjusted with the contour correction switch (DTL).



Noise Suppress Level Setting [Noise Suppress: OFF/LOW/HIGH]

Screen noise can be reduced when Detail Level setting **@** is at HIGH or LOW.

### Fiesh Noise Suppress Level Setting [Flesh Noise Suppress: OFF/LOW/HIGH]

Flesh noise is suppressed in two steps when the DTL Level is at HIGH or LOW.

### Electronic Shutter Setting [Shutter Speed: OFF/1/100 to 1/10 000/S/Scan/Auto ND] (NTSC ONLY)

OFF: Electronic shutter is turned off.

1/100, 1/250, 1/500, 1/1 000, 1/2 000, 1/4 000, 1/10 000: Electronic shutter operates at one of these speeds as selected.

S/Scan (Synchro Scan): Electronic shutter operates at the speed set with the electronic shutter synchro-scan setting

Auto ND: Electronic shutter is controlled to automatically adjust the luminance. (ELC)

### Note -

- In case of using the RCU (RCB), none of the shutter speeds-1/250, 1/2000, 1/4000, and 1/10 000 can be selected.
- In case of using the hybrid control panel, only OFF, 1/100, or Auto ND (ELC) can be selected.
- If the lens iris switch is at M (Manual) when operating the camera alone or when the iris switch on the RCU (RCB) is at AUTO, Auto ND may not function. Set the lens iris switch to A (Auto).
- Flickering may increase at Auto ND under fluorescent lights.
- Auto ND is automatically selected if Auto ND (ELC) setting is set to ON.

### Electronic Shutter Synchro Scan Setting [Synchro Scan: 60.34Hz - 15.75kHz]

This setting is possible only when Electronic Shutter setting **②** is at S/Scan.

Horizontal bar noise can be reduced by synchroscan adjustment in shooting workstation scenes, for example.

-38-

 For luminance settings at each shutter speed and synchro-scan shutter speed, refer to the table below.

Shutter Speed	Synchro-scan	Required luminance ratio
OFF	_	1
1/100	100.3 Hz	2
1/250	250.0 Hz	4
1/500	492.2 Hz	8
1/1 000	984.4 Hz	16
1/2 000	1.969 kHz	32
1/4 000	3.938 kHz	64
1/10 000	7.875 kHz	160

### CCD Read Out Mode Setting [V Resolution: Normal/Fine]

**Normal:** Normal image. (CCD storage will be by field storage.)

Fine: Vertical resolution increases. (Vertical resolution is raised without increasing residual images by frame storage and Electronic shutter.)

Normal is recommended for general use because sensitivity will decrease at the Fine setting.

### PC Control Access Speed Setting [Baud Rate: 1 200bps/2 400bps/4 800bps/9 600bps]

Select a communication speed in controlling the camera from the computer.

### Negative/Positive Selection


[Nega/Posi: Posi/Nega]
Posi: Normal image

Nega: Image is shown reversed in darkness and

color.

Aspect Ratio Selection [Aspect Ratio: 16:9/4:3]

### ■ Sub Menu (User Mode)

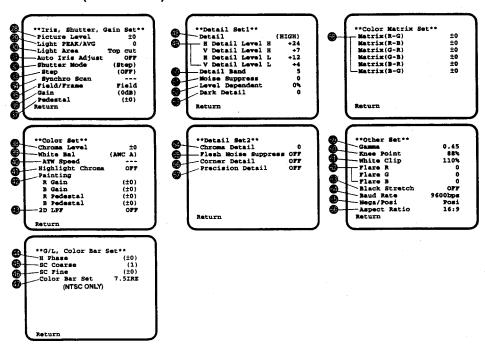

- Settings enclosed in parentheses can be set with the RCU (RCB) switch or VR in RCU (RCB) mode.
- To return to the initial settings, refer to page 48.

-40-

### Setting and Changing of the Setting Items (User Mode)

Video Level Adjustment [Picture Level:

-50 - +50]

Convergence level of AUTO IRIS/AGC/ELC can be adjusted.

Detecting Ratio Adjustment [Light PEAK/AVG: P50 - A50]

The ratio of AUTO IRIS/AGC/ELC detected peak to average can be adjusted within a range.

Photometric Measurement Method Setting [Light Area: All, Center, Top cut, BTM cut, R/L cut]

A photometric measurement method can be selected for AUTO IRIS/AGC/ELC.

All: All the screen area is measured.

Center: The screen is measured mainly in the center area, about one-third of both the top and bottom and one-third of both the right and left portions of the screen are excluded from measurement.

**Top cut:** About one-third of the top portion of the screen is excluded from measurement.

**BTM cut:** About one-third of the bottom portion of the screen is excluded from measurement.


**R/L cut:** About one-third of both the right and left portions of the screen are excluded from measurement.



### Auto Iris Level Fine Adjustment [Auto Iris Adjust: ON/OFF]

ON: Fine adjustment of auto iris convergence level can be made with the iris control when the iris switch on the RCU (RCB) or on the hybrid control panel is in the AUTO position.

OFF: The iris control is invalid when the iris switch on the RCU (RCB) or on the hybrid control panel is in the AUTO position.



-41-

### Electronic Shutter Mode Setting [Shutter Mode: Step/ELC/S/Scan]

**Step:** Electronic shutter operates at the speed selected by the Electronic Shutter Step Setting

**ELC:** Electronic shutter is controlled to automatically adjust the luminance.

S/Scan (Synchro Scan): Electronic shutter operates at the speed selected in Electronic Shutter Synchro-Scan Setting ②.

### Note -

If Frame 1 is selected in CCD Read Out Mode Setting . Electronic Shutter Mode Setting cannot be added.

### Electronic Shutter Step Setting [Step: OFF/1/100 - 1/10 000]

This setting is possible only when Step is selected in Electronic Shutter Mode Setting **29**.

**OFF:** Electronic shutter is turned off.

1/100, 1/250, 1/500, 1/1 000, 1/2 000, 1/4 000,

**1/10 000:** Electronic shutter operates at one of these speeds as selected.

### Notes -

- In case of using the RCU (RCB), none of the shutter speeds-1/250, 1/2 000, 1/4 000, and 1/10 000 can be selected.
- In case of using the hybrid control panel, only OFF, 1/100, or ELC can be selected.
- If the lens iris switch is at M (Manual) when operating the camera alone or when the iris switch on the RCU (RCB) is at AUTO, ELC may not function. Set the lens iris switch to A (Auto).
- Flickering may increase at ELC under fluorescent lights.

### Electronic Shutter Synchro Scan Setting [Synchro Scan: 60.34Hz - 15.75kHz]

This setting is possible only when Electronic Shutter Mode Setting  $\ensuremath{\mathfrak{D}}$  is at S/Scan.

Bar noise can be reduced by synchro-scan adjustment in shooting workstation scenes, for example.

 For luminance setting at each shutter speed and synchro-scan shutter speed, refer to the table on the next page.

-42-

Shutter Speed	Synchro-scan	Required luminance ratio
OFF	_	1
1/100	100.3 Hz	2
1/250	250.0 Hz	4
1/500	492.2 Hz	8
1/1 000	984.4 Hz	16
1/2 000	1.969 kHz	32
1/4 000	3.938 kHz	64
1/10 000	7.875 kHz	160

# © CCD Read Out Mode Setting [Field/Frame: Field/Frame 1/Frame 2]

Field: CCD storage will be by field storage.

Frame 1: Vertical resolution increases in frame storage.

**Frame 2:** Vertical resolution is raised without increasing residual images by frame storage and electronic shutter.

### Gain Up Setting [Gain: AGC HIGH/AGC LOW/ 0 dB - 30 dB / N/Eye]

**AGC LOW:** The Auto Gain Up control with a maximum gain increase of about 18 dB adjusts the luminance automatically.

**AGC HIGH:** The Auto Gain Up control with a maximum gain increase of about 30 dB operates.


0 dB: 0 dB should be selected in normal cases.

1 dB - 30 dB: Use this range if sufficient video output cannot be obtained even when the lens iris is opened in shooting dark scenes.

N/Eye (Night Eye): Use this mode if sufficient video output cannot be obtained even if 30 dB gain up should be selected.

### Notes

- Only 0 dB, 9 dB, or 18 dB, AGC LOW, AGC HIGH can be selected in case of using the RCU (RCB).
   If the lens iris switch is at MANUAL, when operating the camera alone or when the iris switch on the RCU (RCB, Hybrid control panel) is at AUTO, AGC may not function.
- AGC HIGH when the AGC selection switch on the hybrid control panel is at AGC.
- 0 dB when the manual gain switch on the hybrid control panel is at LOW, 9 dB when it is at MID, or 18 dB when it is at HIGH.



Hybrid Control Panel

### Black Level Setting [Pedestal: -30 - +30]

The black level (pedestal) of the luminance (Y) signal can be set. Used in adjusting the black levels of two or more cameras.

- S Chroma Level Adjustment [Chroma Level: -3 +3] Chroma Level can be decreased or increased to three levels.
- White Balance Setting [White Bal: ATW/AWC A/ AWC B/P SET 3 200K/P SET 5 600K]

ATW: The white balance is automatically adjusted to the optimum position.

AWC A, AWC B: Color temperature conditions at two points can be stored at AWC A and AWC B. Once the white balance is adjusted with the ITEM/AWC switch on the back of the camera, it is no longer necessary to set the white balance again if you simply select AWC A or AWC B, provided that the camera is used under the same conditions.

Fine color adjustment can be made after setting AWC by red/blue gain adjustment in Painting Setting or from the RCU (RCB).

- P SET 3 200K: The white balance is adjusted to 3 200K illumination.
- P SET 5 600K: The white balance is adjusted to 5 600K illumination.
- ATW Speed Setting [ATW Speed: SLOW 2/ SLOW 1/MIDDLE/FAST 1/FAST 2]

ATW Speed can be set.

R/B Gain R/B Pedestal Control

### 2-dimensional Lowpass Filter Setting [2D LPF: OFF/LOW/HIGH]

The 2D lowpass filter that reduces moire and cross color can be set.

### Horizontal Phase Adjustment [H Phase: -206 - +49]

Horizontal phase can be adjusted when a genlock signal is supplied.

### Subcarrier Phase Coarse Adjustment [SC Coarse: 1/2/3/4]

Coarse adjustment of subcarrier phase can be made when a genlock signal is supplied.

### 6 Subcarrier Phase Fine Adjustment [SC Fine: -511 - +511]

Fine adjustment of subcarrier phase can be made when a genlock signal is supplied.

### Note

Neither P SET 3 200K nor P SET 5 600K can be set from the RCU (RCB) or the hybrid control panel.

### Highlight Chroma Setting [Highlight Chroma: OFF/LOW/HIGH]

At LOW or HIGH, the color dynamic range widens to prevent highlighted white portions from suppres-

### Painting Setting [Painting: R Gain, B Gain, R Pedestal, B Pedestal: -30 - +30] R Gain, B Gain:

Fine adjustment of the white balance can be made after AWC setting when AWC A or AWC B is selected in White Balance Setting . In case of using the RCU (RCB), use the R/B gain controls for this purpose. The set value returns to ±0 after AWC setting in using the camera alone.

### R Pedestal, B Pedestal:

Fine adjustment of the black balance can be made after ABC setting.

In case of using the RCU (RCB), use the R/B pedestal controls for this purpose. The set value returns to ±0 after ABC setting in using the camera alone.

-44-

### Tolor Bar Setup Setting [Color Bar Set: 0.0 IRE/7.5 IRE1

The setup level of color bar can be adjusted.

### Detail Level Setting [Detail: OFF/LOW/HIGH]

Contour correction quantity can be selected. Detail settings made using the Horizontal/Vertical Detail Level HIGH/LOW Setting 49.

### Horizontal/Vertical Detail Level HIGH/LOW Settina

[H Detail Level H: +1 - +63] [V Detail Level H: +1 - +31]

[H Detail Level L: 0 - +62]

[V Detail Level L: 0 - +30]

Detail level can be set in horizontal (H) and vertical (V) directions with the Detail Level Setting @ at HIGH or LOW

Whichever the direction. H or V, the set level at HIGH must be at least one position higher than that at LOW.

### Detail Band Setting [Detail Band: 1 - 5]

A contour correction band can be set with the Detail Level Setting @ at HIGH or LOW. The higher setting, the finer will be the detail.

### Noise Suppress Compensation Level Setting [Noise Suppress: 1 - 10]

Screen noise can be reduced with the Detail Level Setting (at HIGH or LOW. If the noise suppress compensation level is set too high, a fine object will be reproduced less sharply.

### Level Dependent Compensation Level Setting [Level Dependent: 0% - 25%]

Screen noise due to the detail of dark parts of an object can be reduced.

If level dependent compensation level is set too high, however, hair, for example, will be reproduced less sharply.

# Dark Detail Compensation Level Setting [Dark Detail: 0 - 5]

The contours of the darker portions of an object can be emphasized.

This setting is possible only when the Level Dependent Compensation Level Setting (3) is set to 0 %.

### Chroma Detail Compensation Level Setting [Chroma Detail: 0 - 15]

The contours of high-hue portions of an object can be emphasized.

Flesh Noise Suppress Level Setting [Flesh Noise Suppress: OFF/LOW/HIGH]

Flesh noise is suppressed in two steps when the DTL Level is at HIGH or LOW.

### 

Corner detail, which improves the resolution of corners, can be turned on or off when the Detail Level Setting (a) is at HIGH or LOW.

### Precision Detail Level Setting [Precision Detail: OFF/LOW/HIGH]

This setting is to narrow detail width and suppress detail glare.

### © Color Matrix Compensation Level Setting [Matrix (R-G) / (R-B) / (G-R) / (G-B) / (B-R) / (B-G): -31 - +311

Color Matrix compensation level can be adjusted.

(R-G): To increase or decrease the intermediate color between red and magenta

(R-B): To increase or decrease the intermediate color between red and yellow

-46-

- (G-R): To increase or decrease the intermediate color between green and cyan
- (G-B): To increase or decrease yellowish green
- (B-R): To increase or decrease the intermediate color between blue and cyan
- (B-G): To increase or decrease purple

### Gamma Correction Level Setting

[Gamma: 0.35 - 0.55]

Gamma correction level can be set.

### M Knee Compensation Level Setting [Knee Point: 88% - 98%/Dynamic]

**88% - 98%:** The level of video signals subject to where compensation (knee point) can be set.

**Dynamic:** Knee compensation level is automatically

### 

95% - 110%]
The peak level of video signals to be white-clipped can be set.

# Flare Correction Level Setting [Flare R/G/B: 0 - 100]

Flare correction level can be adjusted.

\* Flare correction level has already been adjusted prior to shipment from the factory.

# Black Stretch Setting [Black Stretch: ON/OFF] Black stretch to correct the suppression of black

portions at low luminance can be set to ON or OFF.

### PC Control Access Speed Setting [Baud Rate: 1 200bps/2 400bps/4 800bps/9 600bps]

This setting is to select a communication speed in controlling the camera from the computer.

### Negative/Positive Selection [Nega/Posi: Posi/Nega]

Posi: Normal image

Nega: Image is shown reversed in darkness and

color.

### - Note -

When an option card is added, only the composite output and Y/C output will be reproduced in negative image.

### Aspect Ratio Selection [Aspect Ratio: 16:9/4:3]

# **SETTING TO INITIAL SET**

### ■ Setting to initial set

In case of the wrong setting in any use mode, take the following steps to return to the initial settings.


- (1) Select [Initialize Data] on the main menu screen of each Use Mode. (See page 29.) Press the YES/ABC switch, then [Initialize Data] screen shown for about 10 seconds.
- (2) Press the YES/ABC switch within about 10 seconds to return to the initial settings, the existing settings

are initialized, the screen shown at  $\ensuremath{\mathfrak{D}}$ , and the camera returns to main menu.

(3) If the NO/BAR switch is pressed, or if the YES /ABC switch is not pressed, within about 10 seconds, the screen shown at ③, and the camera returns to main menu, and the existing settings are not initialized.

### - Note -

If you are using an option card, the Option Card Setting Submenu will not be initialized even if "Return to Initialize" is performed.

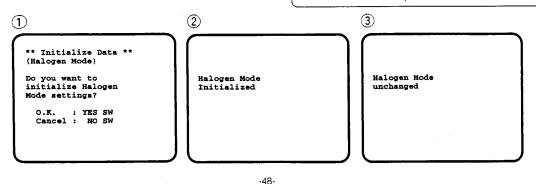

# ■ INITIAL SETTINGS OF THE SETTING ITEMS (Factory preset values)

### • Halogen, Fluorescent, Outdoor Mode

	Item	Halogen mode	Fluorescent mode	Outdoor mode
Brightness Set	Picture Level Light PEAK/AVG Light Area Auto ND (ELC) Auto Gain Up Manu Gain Up Pedestal Contrast (Gamma)	±0 0 Top cut OFF OFF OdB ±0 MID	±0 0 Top cut OFF OFF 0dB ±0 MID	±0 0 Top cut ON HIGH  -10 MID
Color Set	Chroma Level Flesh Tone White Bal ATW Speed High-light Chroma	±0 ±0 AWC A  OFF	+1 ±0 AWC A  OFF	+2 ±0 ATW MIDDLE OFF
G/L, Color Bar Set	H Phase SC Coarse SC Fine Color Bar Set (NTSC ONLY)	±0. 1 ±0 7.5 IRE	±0 1 ±0 7.5 IRE	±0 1 ±0 7.5 IRE
Sharpness (DTL) Set	DTL Select Level Noise Suppress Flesh Noise Suppress	Normal HIGH OFF OFF	Normal HIGH OFF OFF	Normal HIGH OFF OFF
Other Set	Shutter Speed Synchro Scan V Resolution Baud Rate Nega/Posi Aspect Ratio	OFF Normal 9 600bps Posi 16:9	OFF  Normal 9 600bps Posi 16:9	Auto ND Normal 9 600bps Posi 16: 9

### • User Mode

	Item	User mode		Item	User mode
Iris, Shutter, Gain Set	Auto Iris Adjust OFF Shutter Mode Step Step OFF Synchro Scan Field/Frame Field	0 Top cut OFF	Detail Set 2	Chroma Detail Flesh Noise Suppress Corner Detail Precision Detail	0 OFF OFF OFF
		Color Matrix Set	Matrix(R-G) Matrix(R-B) Matrix(G-R) Matrix(G-B) Matrix(B-R) Matrix(B-C)	±0 ±0 ±0 ±0 ±0 ±0	
Color Set	Chroma Level White Bal ATW Speed High-light Chroma Painting R Gain B Gain R Pedestal B Pedestal 2D LPF	±0 AWC A OFF ±0 ±0 ±0 OFF	Other Set	Gamma Knee Point White Clip Flare R Flare G Flare B Black Stretch Baud Rate	0.45 88% 110% 0 0 0 OFF 9600bps
G/L, Color Bar Set	H Phase SC Coarse SC Fine Color Bar Set (NTSC ONLY)	±0 1 ±0 7.5 IRE		Nega/Posi Aspect Ratio	Posi 16 : 9
Detail Set 1	Detail H Detail Level H V Detail Level H H Detail Level L V Detail Level L Detail Band Noise Suppress Level Dependent Dark Detail	HIGH +24 +12 +7 +6 5 0 0% 0			

-50-

# APPEARANCE Unit: inch (mm) Panasonic Panasonic 3.5/16' (84) 15/32' (12) 6-11/16' (170) 25/64' (10)

# SECTION 2

# DISASSEMBLY SERVICE INFORMATION


# **CONTENTS**

1. Disassembly Procedures	INF-1
1-1. Removal of Rear Panel	
1-2. Removal of Fan Motor	
1-3. Removal of Case	
2. Maintenance	
3. Verifying Software Version	
4. Updating Software Version	
TP, VR, SW, Location	
POWER P.C.BOARD	INF-3
ENC P.C.BOARD	INF-3
DRIVE P.C.BOARD	INF-3
DSP P.C.BOARD	
ANALOG P.C.BOARD	

# 1. Disassembly Procedures


### 1-1. Removal of Rear Panel

1. Unscrew 4 screws (A) and remove the Rear Panel.




### 1-2. Removal of Fan Motor

- 1. Unscrew 3 screws (B) on the Fan Motor Case.
- 2. Disconnect the Fan Motor Connector (P2) and remove the Fan Motor.

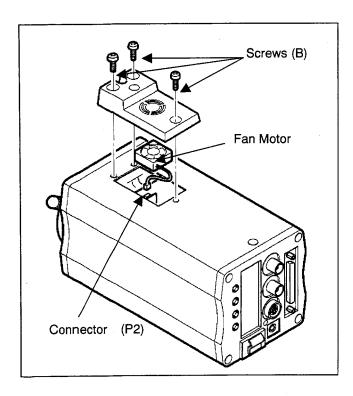


### 1-3. Removal of Case

1. Unscrew 2 screws (C).



2. Unscrew 4 screws (D) and remove the case in the direction indicated by arrow (a).



### 2. Maintenance

The AW-E800A contains the fan motor.

The following is a recommendation to replace it.

Part number


L6FAHBAH003

Expected life

30,000 hours (Using Hours)

# 3. Verifying Software Version

- Open the RAM editor by turning on power while pressing ITEM and YES buttons simultaneously.
- 2. The following menu (RAM Editor) appears on the video output.



RAM address Data

- Move the cursor with ITEM/AWC switch (↓). (Cursor = character blinks)
- Press YES/ABC switch (+) to scroll up the data or NO/BAR switch (-) to scroll down the data. Select RAM address and data line by line.
- To check the software, change the RAM address to FFFF70. The address data shows the version of the software.

Note: Address data is expressed in a hex number.

# 4. Updating Software Version


- Install the new version software (ROM) on the ROM changer board.
- 2. Connect the board to the 50P connector on the body as shown in the figure.
- 3. Set the Baud Rate switch on the ROM changer board to the center position.
  - Since write protection is not activated, write operation can be started regardless of WRITE/PROTECT selection.
- 4. Turn on power of the camera. Than the green LED on the board blinks.
- Press the START button. Then the green LED on the board turns off and the red LED will blink at random.
   If erase the program and then write new program.
   (\*1)
- 6. Confirmation of completion:
  - (a) Green LED lights: completed successful
  - (b) Red LED, green LED blinks: error


After completed successfully, the camera goes into the sleep mode. If will start after power is turned off and then on again.

Turn off power and remove the board.

If it was error, press the START button to re-write. (\*2)


- (\*1) If the operation ends with an error after writing, it is impossible to re-write once power of the camera is turned off. Try writing again by pressing START button.
- (\*2) In case of an error (red LED won't blink) after START, turn power off, set the BAUD RATE switch to either position and retry writing. Normally, used at "0" position but another position may be effective.

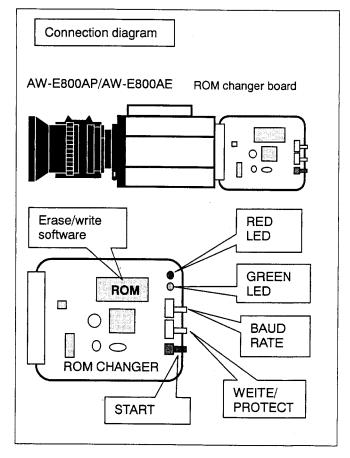




# TP,VR,SW Location


### **POWER P.C.BOARD**




### **ENC P.C.BOARD**




### **DRIVE P.C.BOARD**



# DSP P.C.BOARD

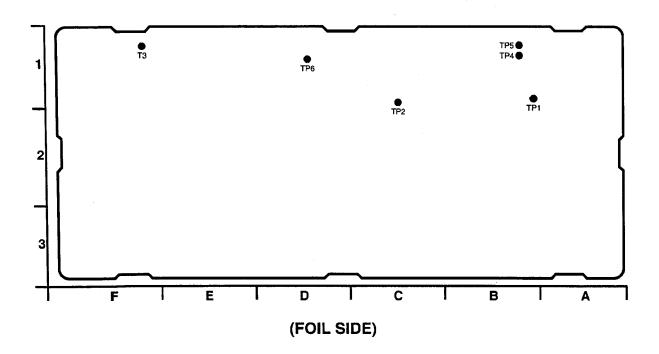

# **ANALOG PROCESS P.C.BOARD**

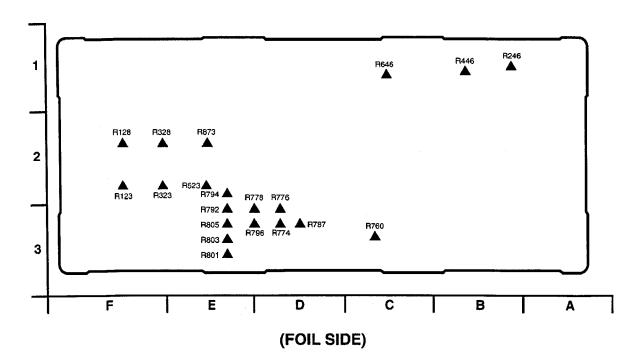

# SECTION 3

# **ELECTRICAL ADJUSTMENT**

### **CONTENTS**

1.	Elec	trical Ad	ljustment Procedures	
	1-1.	Recom	mended Measurement Equipment (M.EQ) and Servicing Fixtures	ELE-1
	1-2.	Extens	ion Board	ELE-1
	1-3.	How to	Read the Adjustment Procedures Table	ELE-2
2.	Prep	aration		
	2-1.	Conne	ction	ELE-3
	2-2.	Setting	Up for Standard Picture	ELE-3
3.	Adju	stment	procedure	
	3-1.	DSP P.	C.Board	
		3-1-1.	Internal Frequency Adjustment	ELE-3
	3-2.	DRIVE	P.C.Board	
		3-2-1.	V SUB Voltage Adjustment	ELE-3
	3-3.	Analog	Process P.C.Board	
		3-3-1.	G Ch CCD Output Adj	ELE-4
		3-3-2.	White Clip Pre-Adjustment	ELE-4
		3-3-3.	Pre-Amp Adjustment	ELE-4
			White Clip Adjustment	
	3-4.		.C.Board	
		3-4-1.	Colour Bar Adjustment	ELE-5
		3-4-2	SC-H Adjustment	ELE-6
	3-5.	Auto A	djustment	
		3-5-1.	Auto Adjustment procedure	ELE-6
	3-6.	CCD B	lemish Compensation	
		3-6-1.	Manual CCD Blemish Compensation procedure	ELE-7

# 1. Electrical Adjustment Procedures

# 1-1. Recommended Measurement Equipment (M.EQ) and Servicing Fixtures

To perform the electrical adjustment completely the following equipment and fixtures are required.


No.	NAME	MODEL No.	REMARK
1	Oscilloscope		
2	Waveform monitor (WFM)	Tektronix 1750,1760, 1780	
3	Vector Scope	Tektronix 1750,1760, 1780	With SCH Meter
4	Frequency Counter		·
5	Monitor TV		Underscannde
6	Gray Scale Chart	VFK0645	
7	Halogen Lamp		
8	Lux Meter		
9	Signal Generator		
10	Auto Iris Lens		
11	AC Adapter		
12	Extension Board		Refer to Blow

### 1-2. Extension Board

Part No.	Connection	Diagram	Remark
0E1A055A	JOINT - PREPROCESS JOINT - DSP/ENCODER		
0E1A056A	DSP – DRIVE	A Bandar of State of	
0E1A057A	DSP – DRIVE		
0E1A058A	DSP - ENCODER	24 24 36 37 37 38 38 38 38 38 38 38 38 38 38 38 38 38	

Part No.	Connection	Diagram	Remark
	G CCD – ANALOG PROCESS B CCD – G CCD R CCD – G CCD R CCD – DRIVE		
0E1A059A	G CCD – DRIVE		ONE SET
	G CCD – ANALOG PROCESS		


## 1-3. How to Read the Adjustment Procedures Table

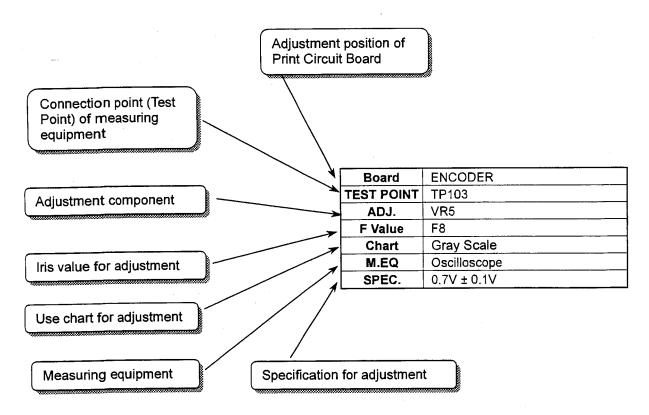

## 2. Preparation

#### 2-1. Connection


Connect the equipment as shown in below.



- Connect the underscanned colour video monitor to the video out on the rear panel of the Convertible Camera AW-E800AP/AE through the waveform monitor and the vectorscope.
  - Terminate the input terminal of the underscanned colour video monitor with 75
- 2. Mount the auto iris lens to the AW-E800AP/AE.
- 3. Connect the power supply unit to the DC 12V input connector on the rear panel of the AW-E800AP/AE.
- For the optional card AW-PB301 and AW-PB302, connect the AW-CA50T6 to the I/F remote connector on the rear panel of the AW-E800AP/AE.
- Terminate the connector of the AW-CA50T6 with
   75

## 2-2.Setting Up for Standard Picture

- The adjustment should be done after 10 minutes warm-up.
- 2. Set the Logarithmic Gray Scale Chart.
- 3. Incident light of 2000 lx on the Logarithmic Gray Scale Chart.
- Aim the Camera at the Logarithmic Gray Scale Chart.
- 5. Set the Camera so that the Logarithmic Gray Scale Chart becomes full picture on the underscanned colour video monitor.
- Connect the oscilloscope to E301 (G-IN) on the analog process board.
- 7. Adjust the lens focus to obtain correct focal point.
- Set the lens iris so that the peak level of the Gray Scale from the Blanking level (E301-G IN) becomes 0.16Vp-p.

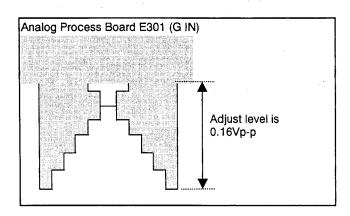

The adjustment should be done with this standard picture, unless otherwise specified.

## 3. Adjustment procedure

## 3-1. DSP P.C.Board

#### 3-1-1. Internal Frequency Adjustment

BOARD	DSP
TEST POINT	TP6
ADJ.	R140 (ENCODE P.C.Board)
F VALUE	
CHART	
M.EQ	Frequency Counter
SPEC.	28.636364MHz ± 10Hz

1. Adjust R140 so that the internal frequency becomes 28.636364 MHz ± 10Hz.

#### 3-2. DRIVE P.C.Board

## 3-2-1. V SUB Voltage Adjustment

BOARD	DRIVE
TEST POINT	E3 (B ch), E2 (G ch), E1 (R ch)
	R123 (VSUB B)
ADJ.	R323 (VSUB G )
	R523 (VSUB R)
F VALUE	Open
CHART	
M.EQ	Oscilloscope
SPEC.	Refer to Voltage value seal on the CCD Unit


 Determine the adjustment value of R, G and B by referring to "Voltage value seal" affixed on the CCD unit.

### 3-3. Analog Process P.C.Board

### 3-3-1. G Ch CCD Output Adj.

BOARD	Analog Process P.C.Board
TEST POINT	E301 (G IN)
ADJ.	Lens Iris
F VALUE	(2000Lux /3200K)
CHART	Gray Scale
M.EQ	Oscilloscope
SPEC.	0.16 ± 0.005Vp-p

- 1. Connect the oscilloscope to E301 (G IN).
- 2. Adjust lens iris so that the signal level is within the specification.



### 3-3-2. White Clip Pre-Adjustment

BOARD	Analog Process P.C.Board
	E107 (R IN)
TEST POINT	E307 (G IN)
	E507 (B IN)
	R123 (R WC) R128 (R DC)
ADJ.	R323 (G WC) R328 (G DC)
	R325 (B WC) R 528 (B DC)
F VALUE	(2000Lux /3200K)
CHART	Gray Scale
M.EQ	Oscilloscope
SPEC.	Refer to VR SET POSITION

- Observe at E107, E307 and E507 by the oscilloscope and preset the VR SET POSITION as shown in Figure.
- Adjust the white clip VR (R123, R323, R523) so that the signal is not clipped.
- 3. Adjust the preamp DC VR (R128, R328, R528) so that the video signal level is not changed.

#### (VR SET POSITION)

R123 (R ch) R323 (G ch) R523 (B ch)



R128 (R ch)

R328 (G ch)

R528 (B ch)


White Clip VR Position


Pre-Amp DC VR Position

#### 3-3-3. Pre-Amp Adjustment

BOARD	Analog Process P.C.Board	
	E307 (G IN)	
TEST POINT	E507 (B IN)	
	E107 (R IN)	
	R446 (G LEVEL) R328 (G DC)	
ADJ.	R646 (B LEVEL) R528 (B DC)	
	R246 (R LEVEL) R128 (R DC)	
F VALUE	(2000Lux /3200K)	
CHART	Gray scale	
M.EQ	Oscilloscope	
	Signal level : 0.3 ± 0.005Vp-p	
SPEC.	DC level : 0V ± 0.01V (R,G ch)	
	: 0.1V ± 0. 01V (B ch)	

- 1. Observe at E307 (G IN) by the oscilloscope, adjust R446 (G LEVEL) so that the signal level is 0.3V  $\pm$  0.005Vp-p.
- 2. Adjust R328 (G DC) so that the DC voltage at E307 becomes 0V ± 0.001V p-p.
- 3. Observe at E507 (B IN) by the oscilloscope, adjust R646 (B LEVEL) so that the signal level is  $0.3V \pm 0.005Vp-p$ .
- 4. Adjust R528 (B DC) so that the DC voltage at E507 becomes  $0.1V \pm 0.001V$  p-p.
- Observe at E107 (R IN) by the oscilloscope, adjust R246 (R LEVEL) so that the signal level is 0.3V ± 0.005Vp-p.
- 6. Adjust R128 (R DC) so that the DC voltage at E107 becomes  $0V \pm 0.001V$  p-p.

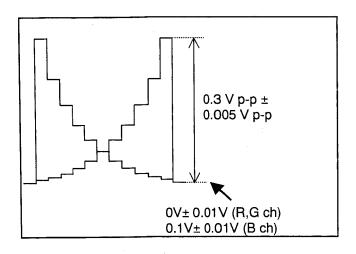

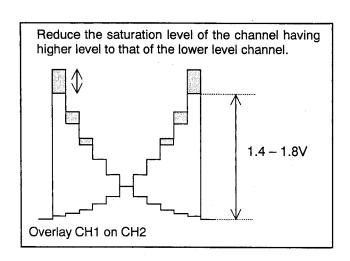

#### 3-3-4. White Clip Adjustment

BOARDE	Analog Process P.C.Board
	E307 (G IN)
TEST POINT	E107 (R IN)
	E507 (B IN)
	R123 (R WC) R128 (R DC)
ADJ.	R323 (G WC) R328 (G DC)
	R523 (B WC) R528 (B DC)
F VALUE	F9.5 +3 (2000Lux/3200K)
CHART	Gray Scale
M.EQ	Oscilloscope
SPEC.	Saturation Level: 1.4Vp-p - 1.8Vp-p

- 1. Adjust the lens iris by more than 3 stops from the normal optical content position.
- 2. Connect CH1 of the oscilloscope to E307 and CH2 of the oscilloscope to E107.

 Oscilloscope
 Test Point

 CH1
 E307 (G IN)

 CH2
 E107 (R IN)

- (1) If the clip level is under saturation level, adjust R123 (R WC) and R323 (G WC) so that the two signal levels coincide with each other from 1.4V p-p to 1.8V p-p.
- (2) If the clip level is over saturation level, adjust R123 (R WC) and R323 (G WC) so that the same level is 1.4V p-p to 1.8V p-p.
- Adjust R523 (B WC) so that the signal level at E507 (B IN) coincides with the signal level at E307.


**Note:** After this adjustment, confirm the each white clip level is same level.

#### 3-4. ENC P.C.Board

## 3-4-1. Colour Bar Adjustment

BOARDE	ENC P.C.Board
TEST POINT	VIDEO OUT
	R190 (Y_BLK)
ADJ.	R132 (B_CB)
	R188 (R_CB)
F VALUE	
CHART	
M.EQ	WFM Monitor, Vectoscope
SPEC.	Black Level: 0IRE ± 0.5IRE
SPEC.	Y Level: 100IRE ± 2IRE

- 1. Observe at video out signal by the WFM monitor and Vectorscope.
- 2. Change video out to Colour Bar signal.
- 3. From the menu, set the setup to 0IRE.
- Adjust R190 (Y\_BLK) so that black level of the colour bar on WFM monitor meets the specification.
- 5. Verify that the Y level meets the specification.
- 6. From the menu, set the setup to 7.5IRE.
- 7. Adjust R132 (R\_CB) and R188 (B\_CB) so that carrier balance is at the center on the vector scope.
- 8. Verify that the Y level and all colours of the colour bar are within the + mark on the vector scope.

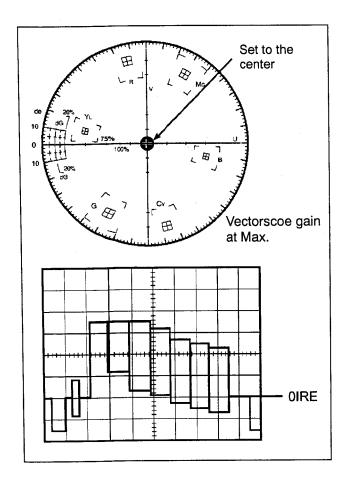

- \* If Y level, burst level or chroma level of the colour bar is out of the specification, go to the following adjustment steps.
- (A) When Y level of the colour bar is out of the specification:
  - 1. Switch video to colour bar.
  - Open the RAM editor by turning on power while pressing ITEM/AWC SW (1) and YES/ABC SW (+) simultaneously.
  - 3. Change to address FFE21C by moving the cursor with ITEM/AWC SW (↓).
  - Observe Y level on the waveform monitor.
     Change the numerical value with YES/ABC SW
     (+) or NO/BAR SW
     to meet the specification.
- (B) When burst level or chroma level of the colour bar is out of the specification:
  - Switch video to colour bar. Open the RAM editor.
  - At address FFE21E, change numerical value so that burst level meets the specification.
  - 3. At address FFE21F, change numerical value so that chroma level meets the specification.

#### 3-4-2. SC-H Adjustment

BOARDE	ENC P.C.Board
TEST POINT	VIDEO OUT
ADJ.	R192 (SC-H)
F VALUE	
CHART	
M.EQ	SC-H METER
SPEC.	0° ± 5 °

- 1. Connect the SC-H Meter to VIDEO OUT.
- 2. Adjust R192 (SC-H) so that the SC-H phase is within the specification.

## 3-5. Auto Adjustment 3-5-1. Auto Adjustment Procedure

 Turn the power ON while pressing the ITEM/AWC SW (1), YES/ABC SW (+) and NO/BAR SW (-) on the rear panel. The Automatic Adjustment menu will be displayed on the video output signal as shown below.


	* *Auto A	\djust* *		
Iris Memory	82			
Auto Adjust	Step	00		
1. Pedestal	3F	3B	40	
2. Pulcan	A6	9F	B9	
3. Gain	6A	A6	73	
4. Gamma	19	1B	1B	
5. Flare	FF	AC	F8	
6. S.E	80808384	858988890		
5600K Adjust	АЗ	57		
ABC ADJ R ± 0	AWC AD	JR±0		
ABC ADJ B ± 0	AWC AD	JB±0		

- 2. Connect the Oscilloscope to E307 on the Analog Process Board.
- Set the Lens Iris so that the peak level of the Gray Scale from the Blanking level becomes 0.3 V± 0.05 V p-p.
- Press the YES/ABC SW (+), to memorize Lens Iris data
- 5. Set the Lens Iris to the Automatic Side.
- 6. Select the Automatic Adjustment Item by the ITEM/AWC SW (↓), and press the YES/ABC SW (+) to start the Automatic Adjustment.
- After Automatic Adjustment finished, will be displayed "OK".
- 8. Confirm turn the power OFF and ON again so that the Camera return to the Normal mode.
- 9. Press the YES/ABC SW (+), and confirm the Black balance operation is normality.
- 10. Press the ITEM/AWC SW (↓), and confirm the White balance operation is normality.

## 3-6. CCD Blemish Compensation


## 3-6-1. Manual CCD Blemish Compensation procedure

 While pressing ITEM/AWC SW (↓) and NO/BAR SW (-) on the Rear Panel, turn on power. The blemish compensation menu will be displayed on the video output as shown below.




- 2. Select the blemish compensation number with MENU switch ( $\uparrow$ ) or ITEM/AWC switch ( $\downarrow$ ).
- 3. Using YES/ABC switch (+) or NO/BAR switch (-), select the position of flaw to be corrected by moving it in V or H direction.

Pressing NO/BAR switch (-) selects the mode in the order shown below:



4. When the cursor is moving, character disappears and the cursor is displayed as shown below.



- 5. The position of the cursor is moved with MENU switch (↑) or ITEM/AWC switch (↓).
- 6. When the point of intersection is at the blemish, the blemish will be compensated.
- To compensate another blemish, repeat the above steps.
- 8. After compensation, move blinking character to End and press YES/ABC switch (+).

<sup>\*</sup>Note that up to 8 blemishs can be compensated.

## BLOCK DIAGRAM SCHEMATIC DIAGRAMS

#### **CONTENTS**


BLOCK DIAGRAM	
DRIVE/ANALOG PROCESS (1/2) BLOCK DIAGRAM	BLK-1
ANALOG PROCESS (2/2) BLOCK DIAGRAM	BLK-2
ENCODER BLOCK DIAGRAM	BLK-3
DSP BLOCK DIAGRAM	BLK-4
POWER/POWER SUB BLOCK DIAGRAM	BLK-5
SCHEMATIC DIAGRAMS	
CCD G ch SCHEMATIC DIAGRAM	SCM001
CCD R ch SCHEMATIC DIAGRAM	SCM002
CCD B ch SCHEMATIC DIAGRAM	SCM003
DRIVE (NTSC) SCHEMATIC DIAGRAM	SCM004
ENC (NTSC) SCHEMATIC DIAGRAM	
POWER/ POWER SUB SCHEMATIC DIAGRAM	SCM006
JOINT SCHEMATIC DIAGRAM	SCM007
DSP SCHEMATIC DIAGRAM	SCM008
ANALOG PROCESS SCHEMATIC DIAGRAM	SCM011

#### IMPORTANT SAFETY NOTICE


COMPONENTS IDENTIFIED WITH THE MARK A HAVE THE SPECIAL CHARACTERISTICS FOR SAFETY. WHEN REPLACING ANY OF THESE COMPONENTS USE ONLY THE SAME TYPE.


DO NOT USE THE PART NUMBER SHOWN ON THIS DRAWING FOR ORDERING. THE CORRECT PART NUMBER IS SHOWN IN THE PARTS LIST.


AND MAY BE SLIGHTLY DIFFERENT OR AMENDED SINCE THIS DRAWING WASPREPARED.

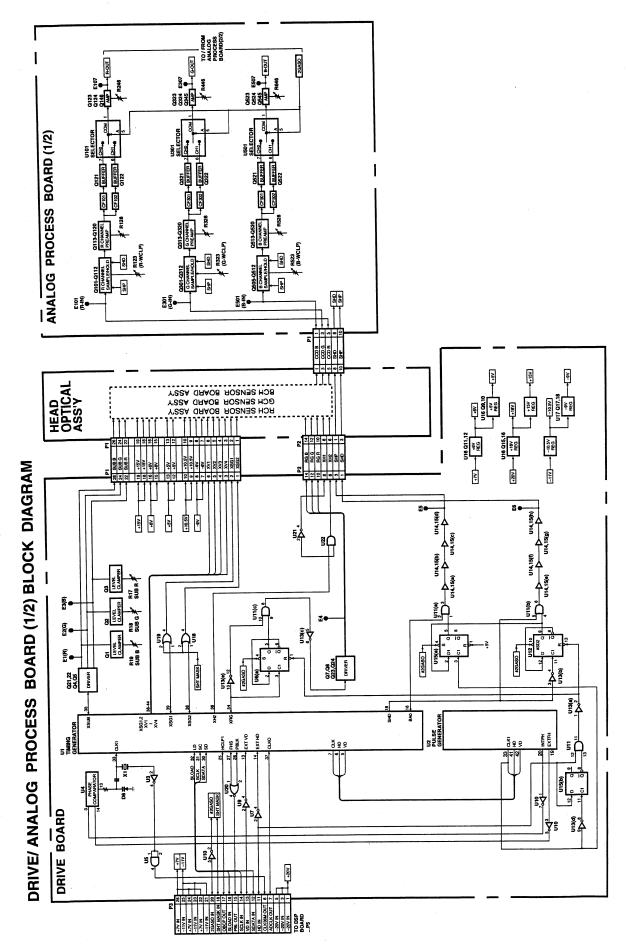


BLK-1

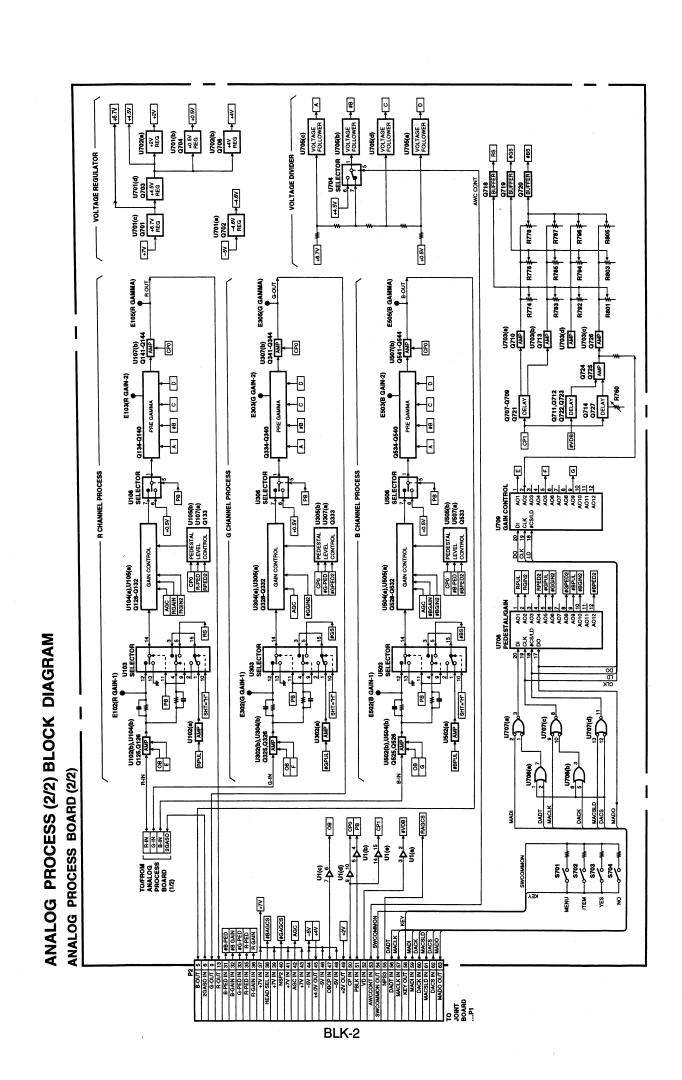


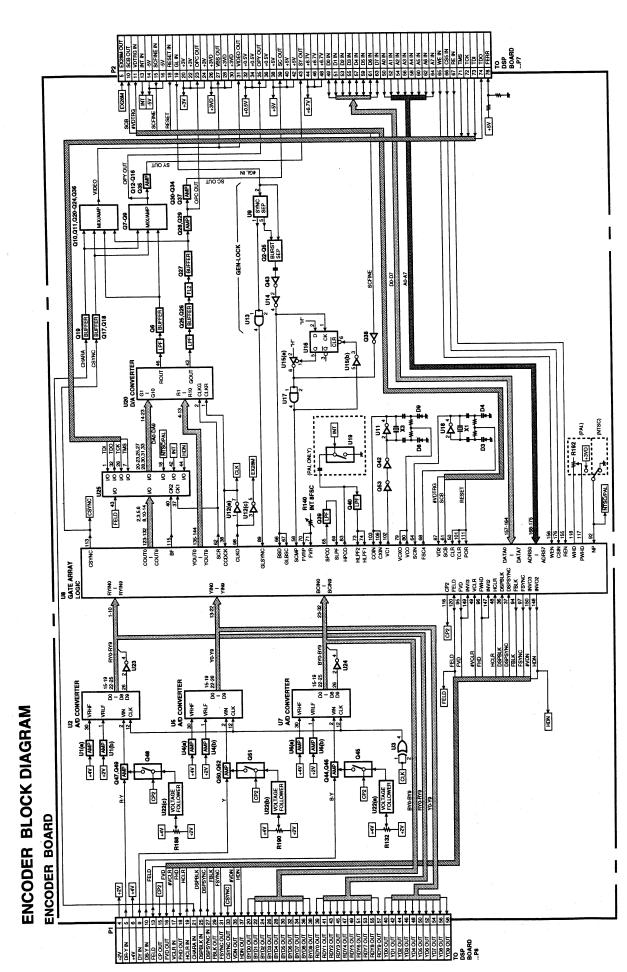


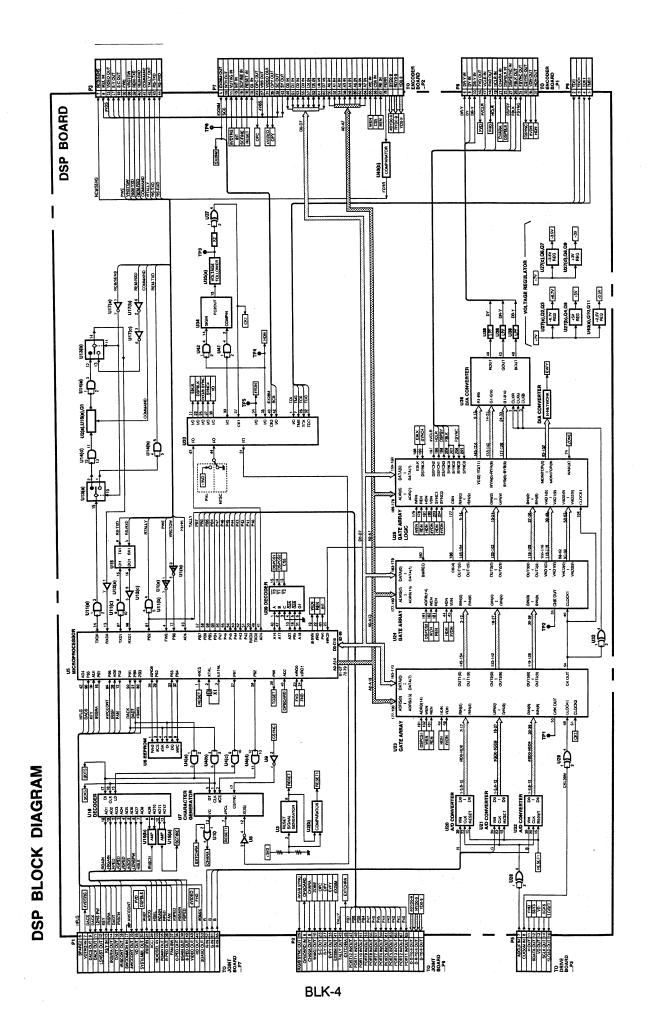


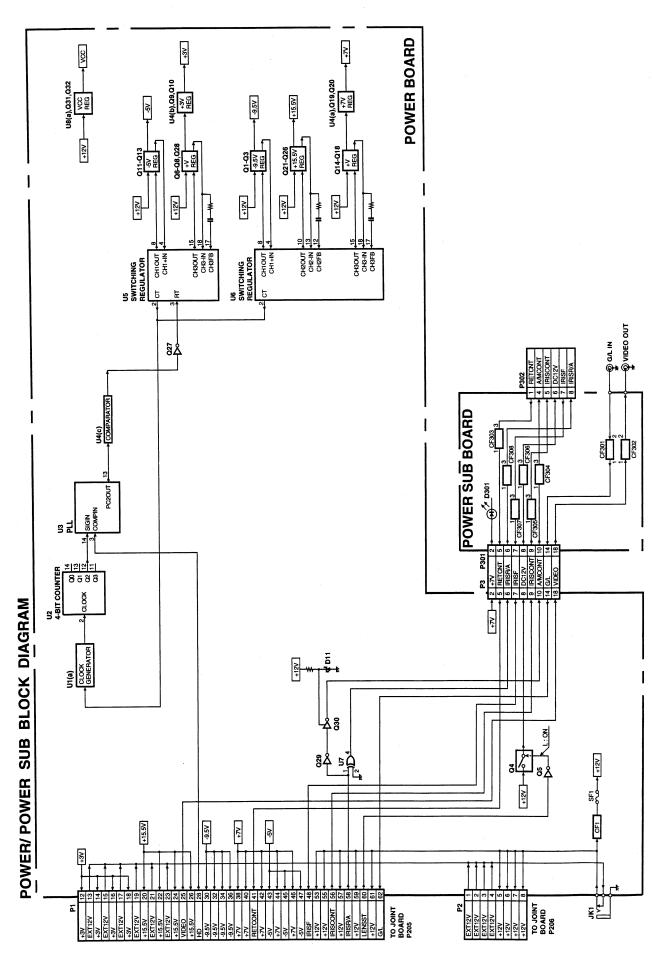



BLK-5

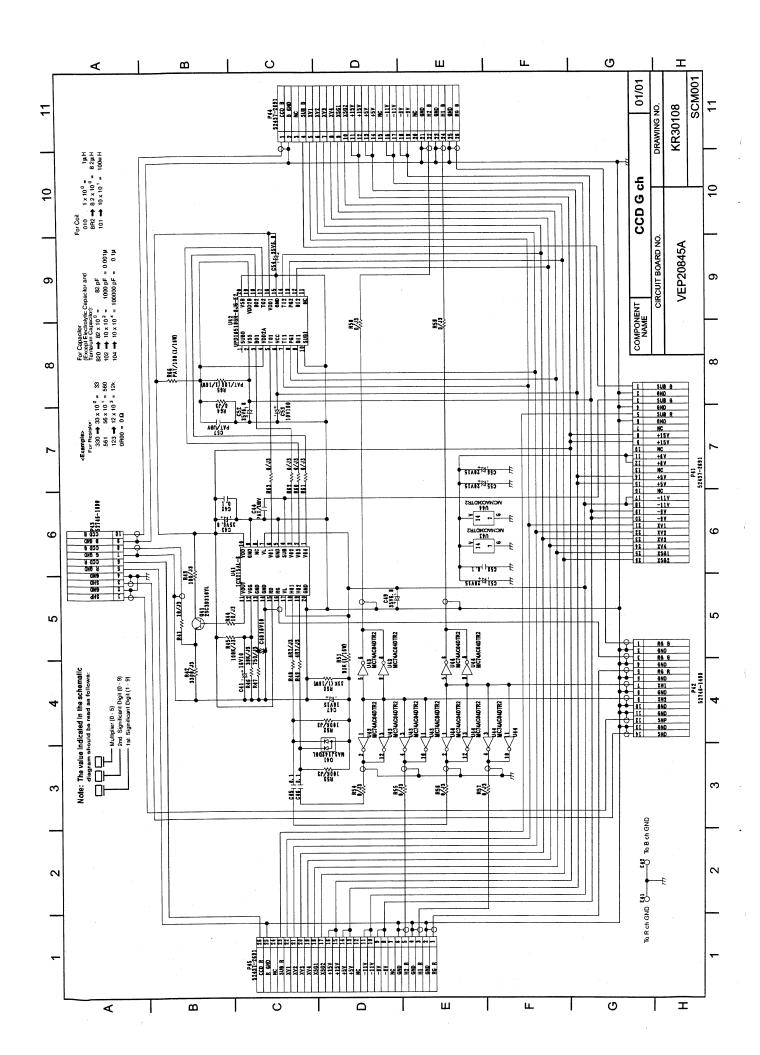


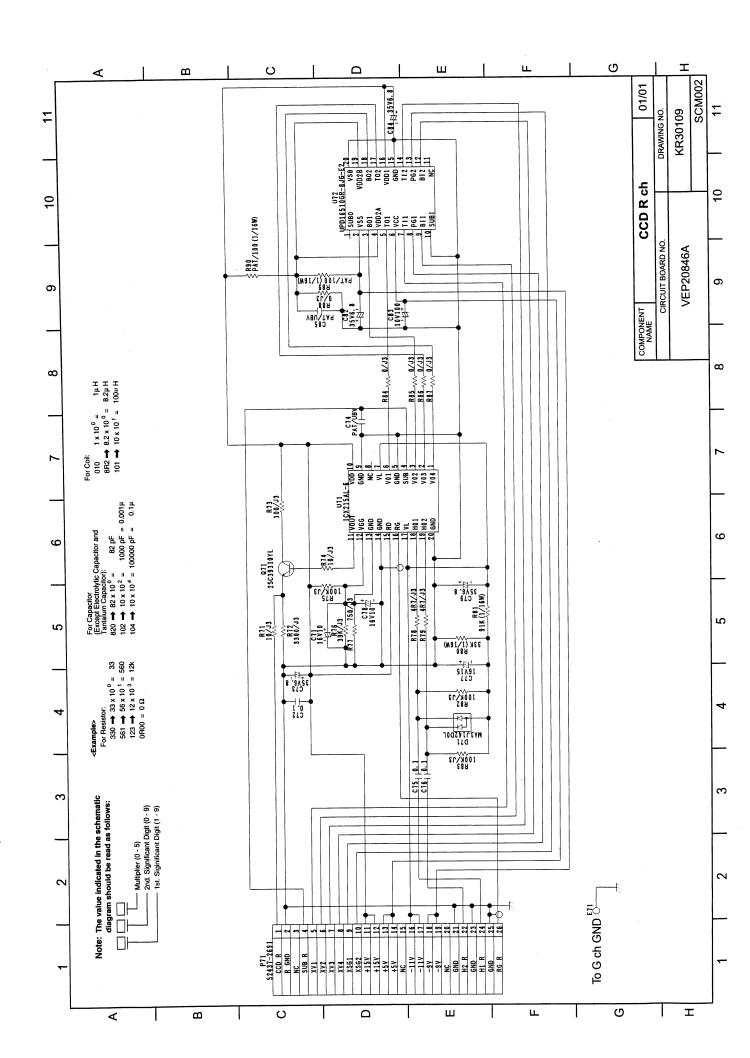


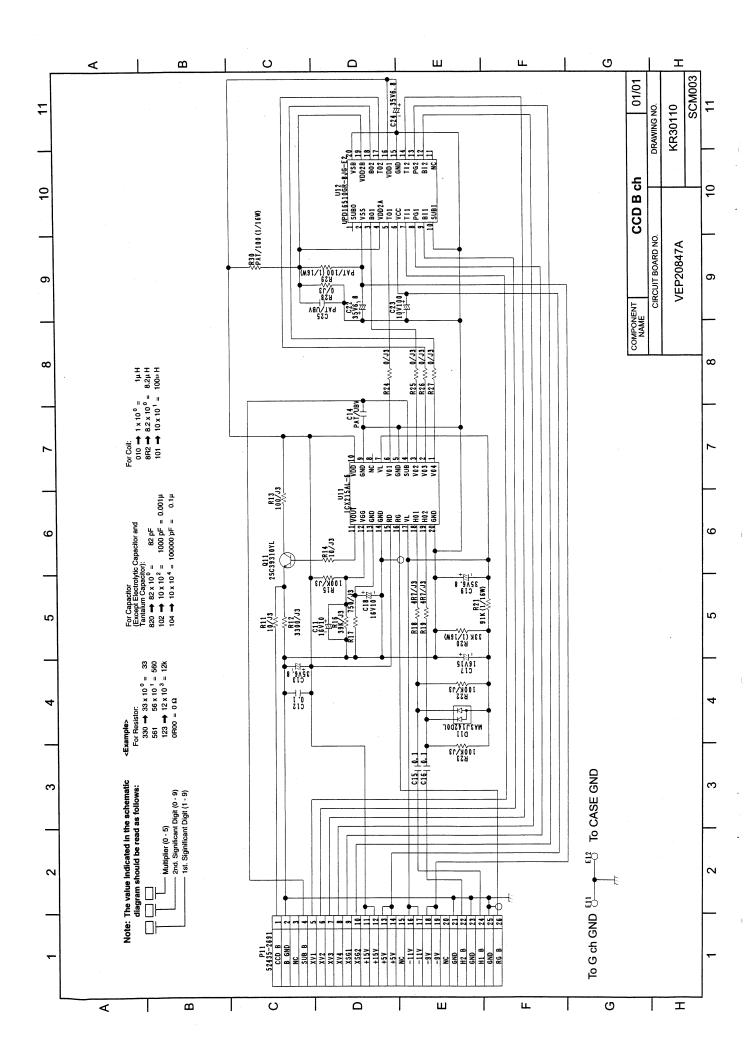


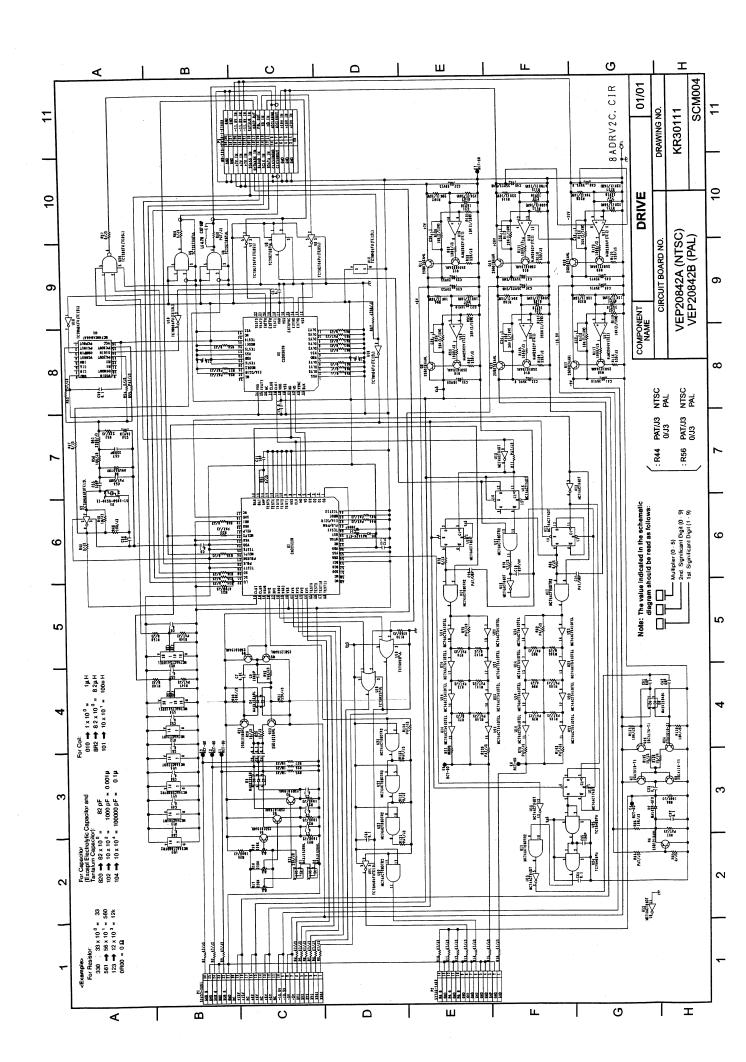


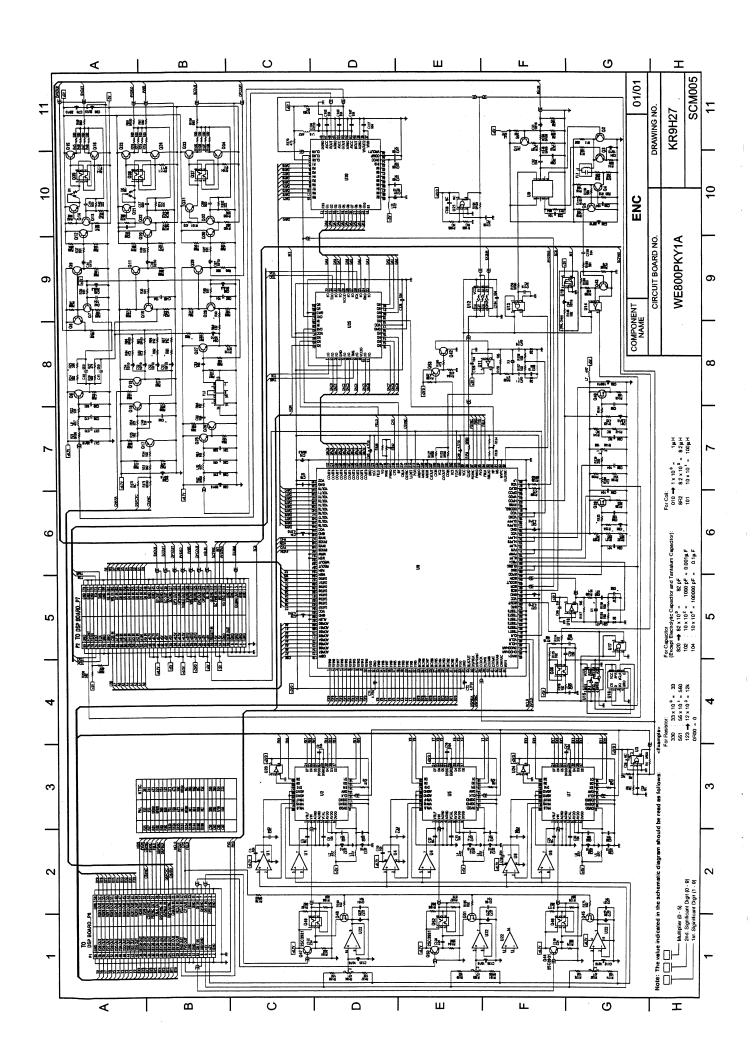


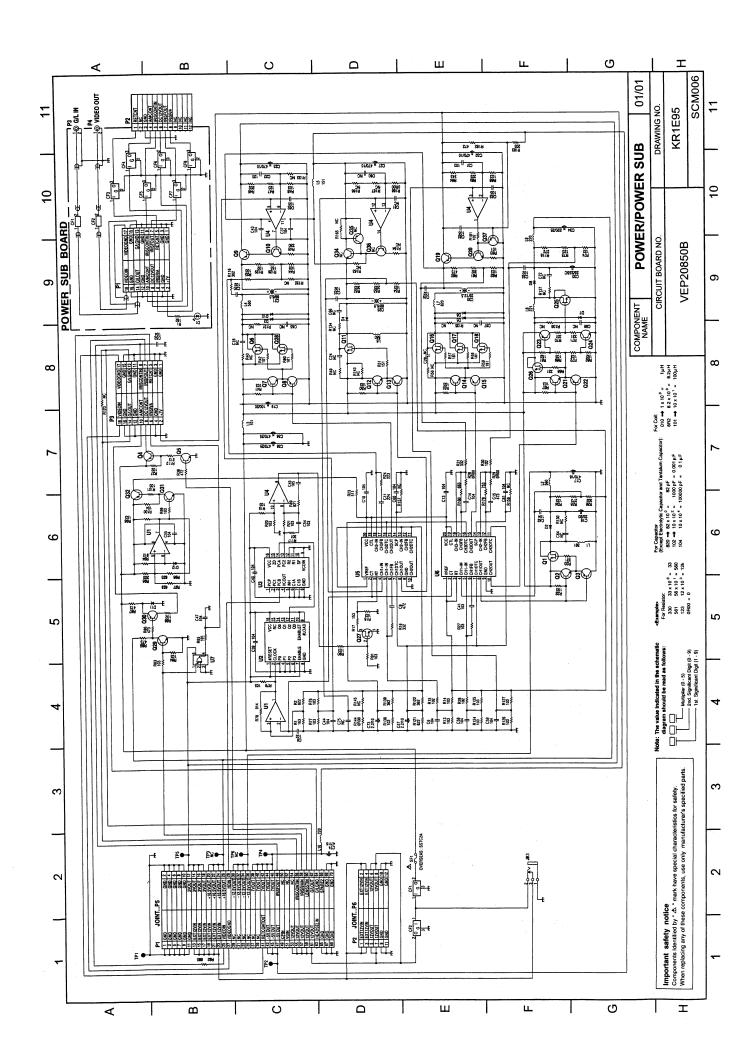


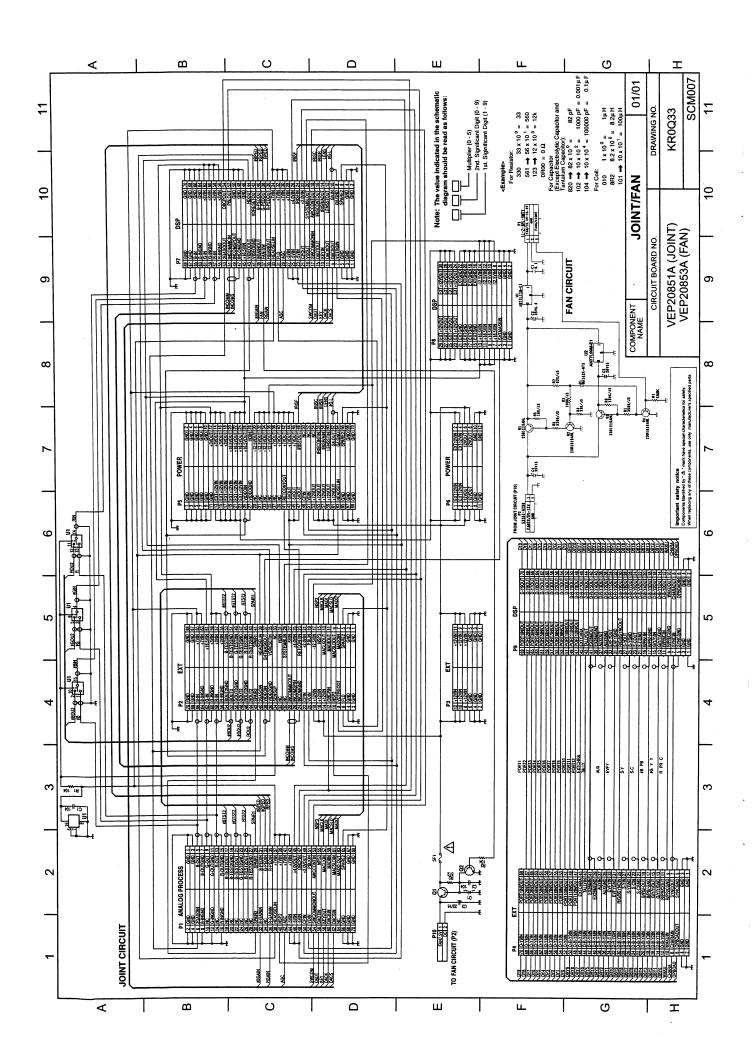


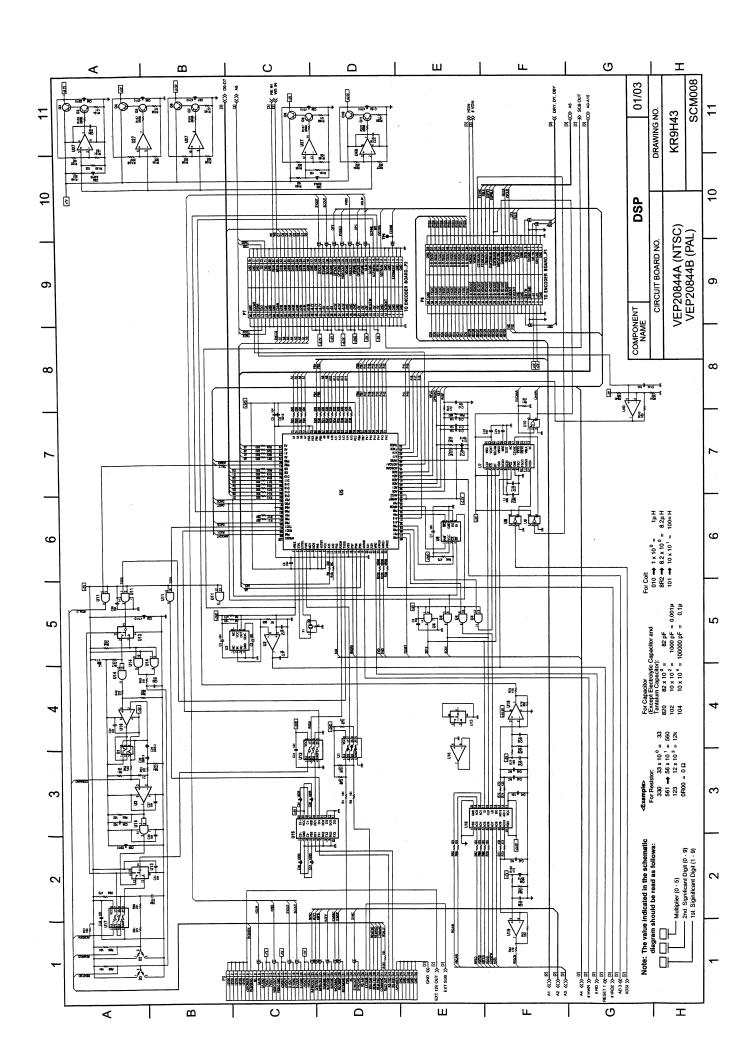

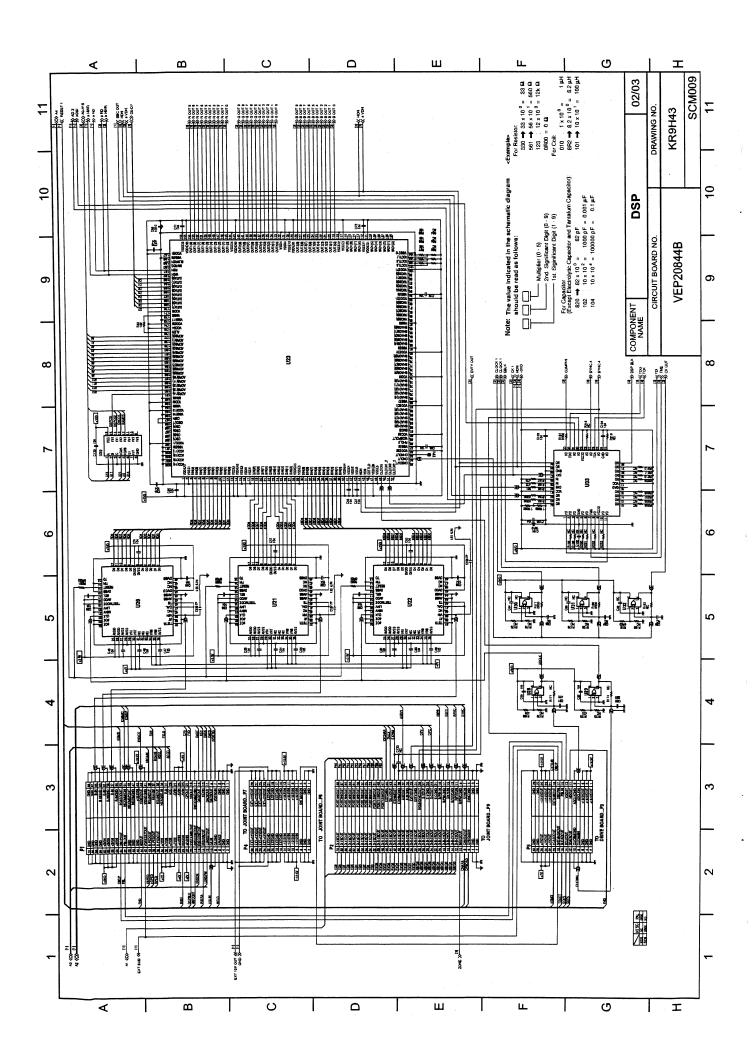


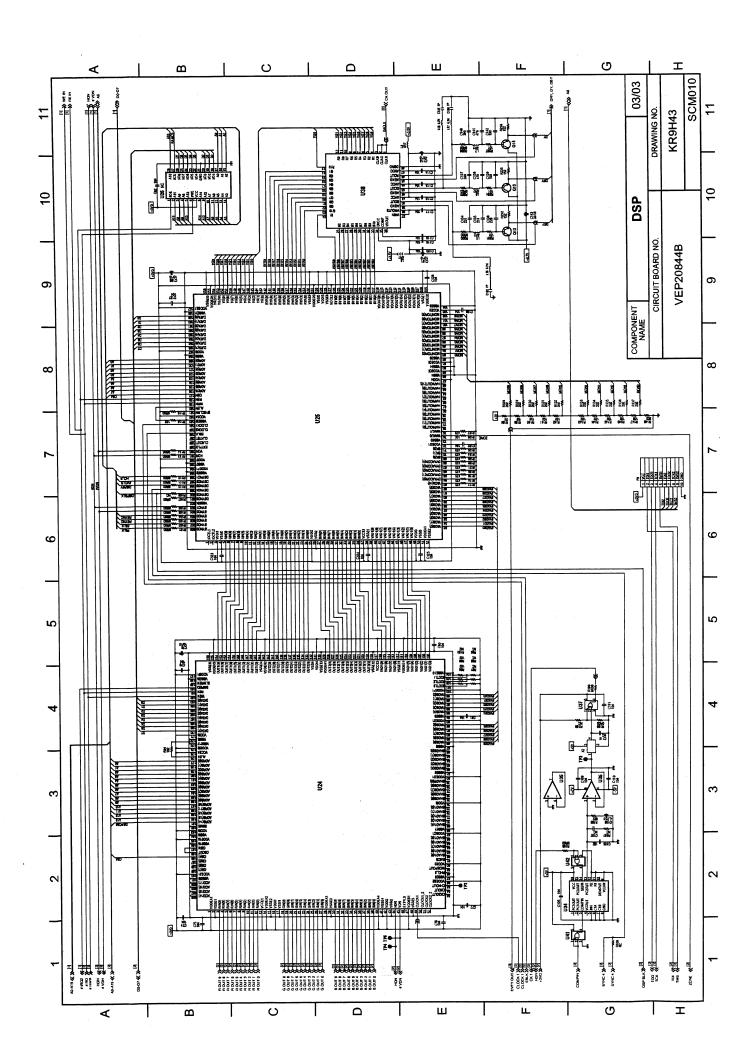

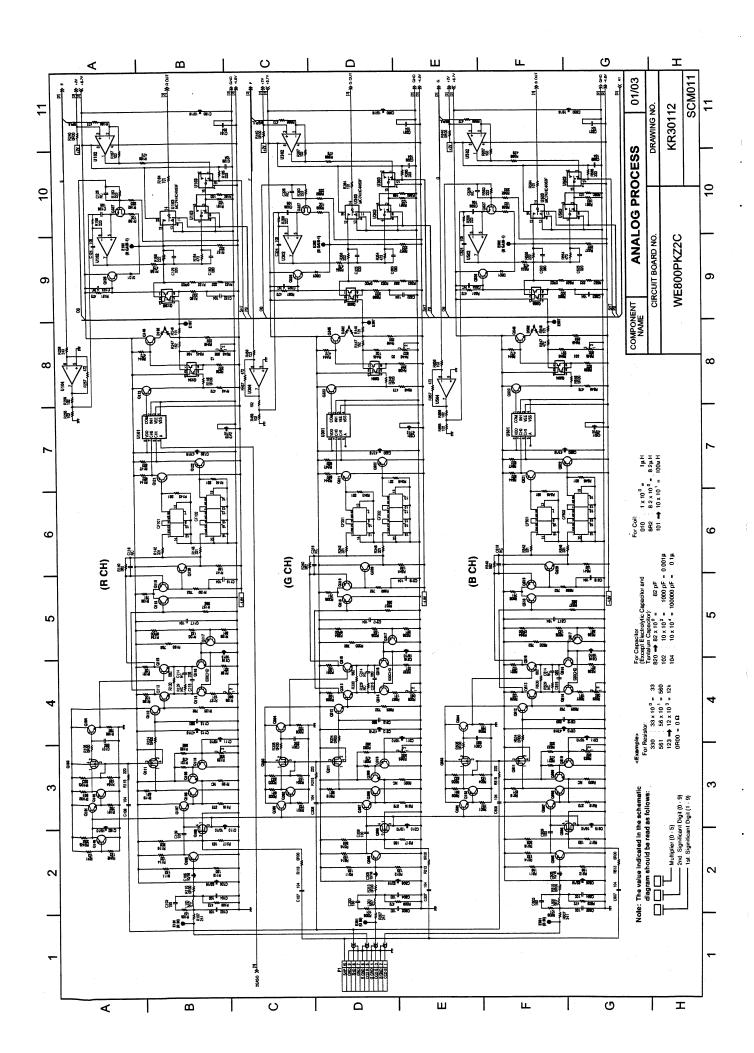

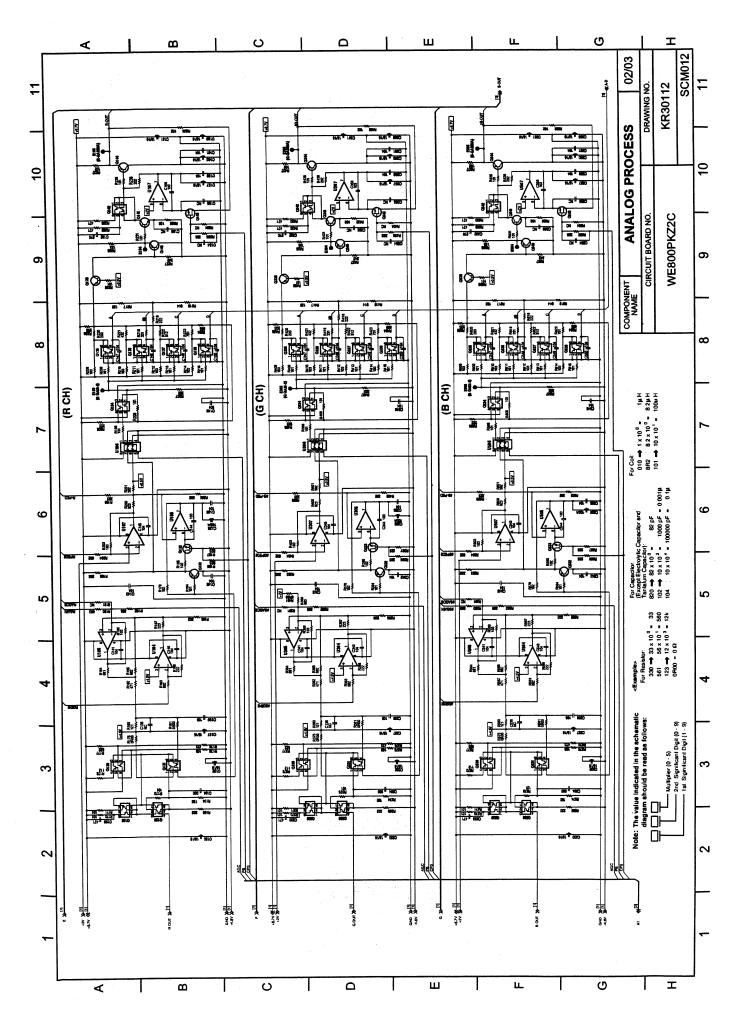

.

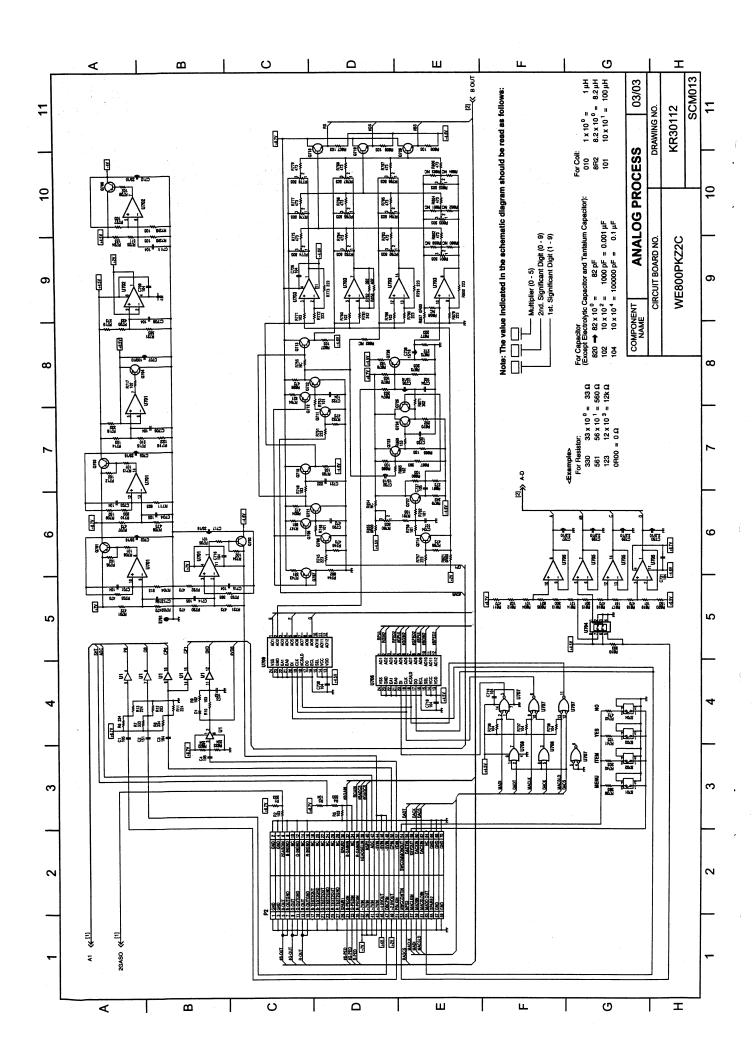

## SECTION 5


# **EXPLODED VIEWS** REPLACEMENT PARTS LIST

#### Note:

- 1. \*Be sure to make your orders of replacement parts according to this list.
- 2. Unless otherwise specified, all resistors are in OHMS, K=1,000 OHMS, all capacitors are in MICROFARADS ( $\mu F$ ), P= $\mu \mu F$ .
- 3. The P.C. Board untils marked with "■" shown below the main assembled parts.
- 4. The parts marked with ©on the exploded view show the electric parts.
  5. IMPORTANT SAFETY NOTICE Components identified with the mark  $\Delta$  have the special characteristics for safety. When replacing any of these components, use only the same type.
- 6. The marking (RTL) indicates the retention time is limited for this item. After the diacontinuation of this assembly in production, it will no longer be available.

#### CONTENTS

CASING AND PACKING PARTS ASSEMBLY.....PRT-1

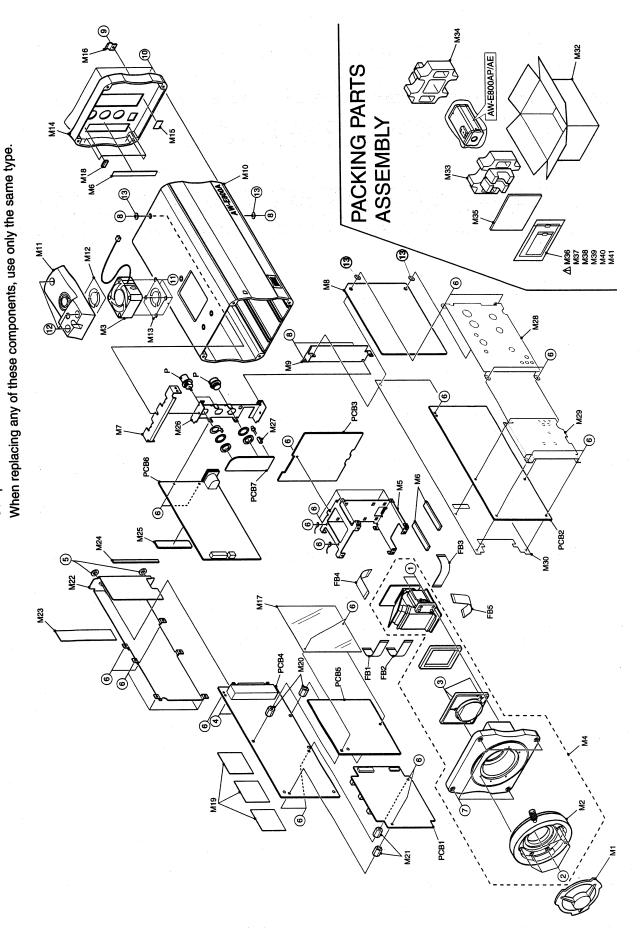

PRT-1

Components identified with the mark  $\triangle$  have the special characteristics for safety. When replacing any of these components, use only the same type.

## **CASING PARTS LIST**

CAOII	10 17		_	
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
RCI. HO.	1020 1101			
	WN-0003	MOUNT CAP	1	
M2	0E1A053A	BAYONET MOUNT RING	1	
M3	L6FAHBAH003	FAN MOTOR	1	
M4	VYQ2146	HEAD OPTICAL ASS'Y	-1	
M5	1B1B820A	CHASSIS	1	
	1C1A133A	GASKET B	1	
M6			-	
M7	1B1B009A	P. C. BOARD GUIDE ANGLE	-	
M8	1C1A073A	SHIELD PLATE	_1	
M9	1A1A234A	BLANK PANEL	_1	
M10	VKM5542	MAIN CASE	1	
M11	VKM5543	FAN MOUNTING BRACKET	1	
M12	VMA0653	FAN FIX PLATE (UPPER)	1	
M13	VMA0G54	FAN FIX PLATE (LOWER)	1	
		REAR ESCUTCHEON	1	
M14	AC1A004D		-	
M15	1C1A112A	GASKET A	_1	
M16	V2GA0065A4	LENS CABLE CLAMP	$\Box$	
M17	VMAOG64A	SHIELD SHEET	1	
M18	1C1A130A	GASKET D	4	
M19	5G1A068B	SHEET	1	
			1	
M20	ASB2607	SPACER	-	
M21	ASB2608	SPACER	1	
M22	VMA0G56	HEAT SINK	1	
M23	5H1A056A	INSULATOR	1	
M24	VMT1177	GASKET C	1	
			1	
M25	5G1A102A	HEAT SINK	-	
M26	1B1B010A	CONNECTOR ANGLE	1	
M27	LH55	HOLDER	1	
M28	VMA0J27	SHIELD PLATE	1	
M29	VMA0G55	SHIELD PLATE	1	
M30	VMA0J25	SHIELD SHEET	1	
			₩.	COD AW EGGOAD
M32	VGP0G99	PACKING CASE		FOR AW-E800AP
M32	VGPOH24	PACKING CASE	1	FOR AW-E800AE
M33	601A120B	CUSHION (A)	1	
M34	6D1A121A	CUSHION (B)	1	}
M35	6D1A122A	PAD	1	
	VQT8984	OPERATING INSTRUCTIONS		FOR AW-E800AP
<u>∧</u> м36				FOR AW-E800AE
<u>1</u> №36	VQT9056	OPERATING INSTRUCTIONS	+-	FOR AN EGOOAL
M37	VKM5550	TRIPOD MOUNTING BRACKET	1	
M37 M38	VKM5550 XYN4+J8FN	SCREW	2	
			-	
M38	XYN4+J8FN	SCREW	2	
M38	XYN4+J8FN	SCREW	2	
M38 M39 FB1	XYN4+J8FN XZB7X10C03	SCREW POLYETHYLENE BAG SPECIAL CABLE	2	
M38 M39 FB1 FB2	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE	2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE	2 2 1 1	
M38 M39 FB1 FB2	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE	2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	
M38 M39 FB1 FB2 FB3	XYN4+J8FN XZB7X10C03 26E800A2 14E800A3 10E800A4	SCREW POLYETHYLENE BAG  SPECIAL CABLE SPECIAL CABLE SPECIAL CABLE FLAT CABLE	2 2 1 1	

## **PACKING PARTS LIST**

Ref. No.         Part No.         Part Name & DescriptionPcs         Ref.           1         XYN3+C8FX         SCREW         2           2         XSN3+8FN         SCREW         6           3         XON2+A3FZK         SCREW         3           4         XSB25+4FN         SCREW         2           5         XWA23BFN         WASHER         2           6         XSB26+4FN         SCREW         24           7         XSN26+8FZK         SCREW         4           8         XSN26+8FN         SCREW         4           9         XSB2+4FZK         SCREW         1           10         XSN28+9FN         SCREW         4           11         XSB28+4FX         SCREW         4           12         XSB28+8FN         SCREW         3           13         XWC26BF         WASHER         4	emarks
2     XSN3+8FN     SCREW     6       3     XQN2+A3FZK     SCREW     3       4     XSB25+4FN     SCREW     2       5     XWAZ5BFN     WASHER     2       6     XSB26+4FN     SCREW     24       7     XSN26+8FXK     SCREW     4       8     XSN26+6FN     SCREW     4       9     XSB2+4FXK     SCREW     1       10     XSN26+9FN     SCREW     4       11     XSB2+4FX     SCREW     4       12     XSB26+8FN     SCREW     3	
2     XSN3+8FN     SCREW     6       3     XQN2+A3FZK     SCREW     3       4     XSB25+4FN     SCREW     2       5     XWAZ5BFN     WASHER     2       6     XSB26+4FN     SCREW     24       7     XSN26+8FXK     SCREW     4       8     XSN26+6FN     SCREW     4       9     XSB2+4FXK     SCREW     1       10     XSN26+9FN     SCREW     4       11     XSB2+4FX     SCREW     4       12     XSB26+8FN     SCREW     3	-
3 XON2+A3FZK SCREW 3 4 XSB25+4FN SCREW 2 5 XWA25BFN WASHER 2 6 XSB26+4FN SCREW 24 7 XSN26+8FZK SCREW 4 8 XSN26+8FN SCREW 4 9 XSB2+4FZK SCREW 1 10 XSN26+9FN SCREW 1 11 XSB2+4FX SCREW 4 11 XSB2+4FX SCREW 4 12 XSB26+8FN SCREW 3	
4 XSB25+4FN SCREW 2 5 XWA25BFN WASHER 2 6 XSB28+4FN SCREW 24 7 XSB26+8FZK SCREW 4 8 XSB26+6FN SCREW 4 9 XSB2+4FZK SCREW 1 10 XSB2+4FZK SCREW 1 11 XSB2+4FX SCREW 4 11 XSB2+4FX SCREW 4 12 XSB26+8FN SCREW 3	-
5         XWA25BFN         WASHER         2           6         XSB28+4FN         SCREW         24           7         XSB28+8FN         SCREW         4           8         XSN28+8FN         SCREW         4           9         XSB2+4FZK         SCREW         1           10         XSN28+9FN         SCREW         4           11         XSB2+4FX         SCREW         4           12         XSB26+8FN         SCREW         3	
6 XSB28+4FN SCREW 24 7 XSN26+8FZK SCREW 4 8 XSN26+6FN SCREW 4 9 XSB2+4FZK SCREW 1 10 XSN26+6FN SCREW 1 11 XSB2+4FZ SCREW 4 11 XSB2+4FX SCREW 4 12 XSB26+8FN SCREW 3	
7 XSN26+8FZK SCREW 4 8 XSN28+6FN SCREW 4 9 XSB2+4FZK SCREW 1 10 XSN26+8FN SCREW 4 11 XSB2+4FX SCREW 4 12 XSB26+8FN SCREW 3	
8         XSN28+6FN         SCREW         4           9         XSB2+4FZK         SCREW         1           10         XSN26+8FN         SCREW         4           11         XSB2+4FX         SCREW         4           12         XSB26+8FN         SCREW         3	
9 XSB2+4FZK SCREW 1 10 XSN28+8FN SCREW 4 11 XSB2+4FX SCREW 4 12 XSB28+8FN SCREW 3	
10         XSN28+8FN         SCREW         4           11         XSB2+4FX         SCREW         4           12         XSB26+8FN         SCREW         3	
11         XSB2+4FX         SCREW         4           12         XSB26+8FN         SCREW         3	
12 XSB26+8FN SCREW 3	
·- (manager (manager)	
PCB1 VEP20842A DRIVE P. C. BOARD 1 FOR AW-E800	OAP
PCB1 VEP20842B DRIVE P. C. BOARD 1 FOR AW-E804	OAE
PCB2 WEBOOPKZ2C ANALOG PROCESS P. C. BOARD 1 FOR AW-E80	OAP
PCB2 WE800EKZ2C ANALOG PROCESS P. C. BOARD 1 FOR AW-E80	
PCB3 VEP20851A JOINT P. C. BOARD 1	
PCB4 VEP20844A DSP P. C. BOARD 1 FOR AW-E80	OAP
PCB4 VEP20844B DSP P. C. BOARD 1 FOR AW-E80	
PCB5 WEBOOPKY1B ENC P. C. BOARD 1 FOR AW-E80	
PC85 WE800EKY1B ENC P. C. BOARD 1 FOR AW-E80	OAE
PCB6 VEP20850B POWER P. C. BOARD 1	
PCB7 VEP20852A POWER SUB P. C. BOARD 1	